





# INSTALLING NEW LOUDER SIREN ALARM KITS

## APPLICABLE TO AF2260V AND AF9860V SERIES EXIT DEVICE

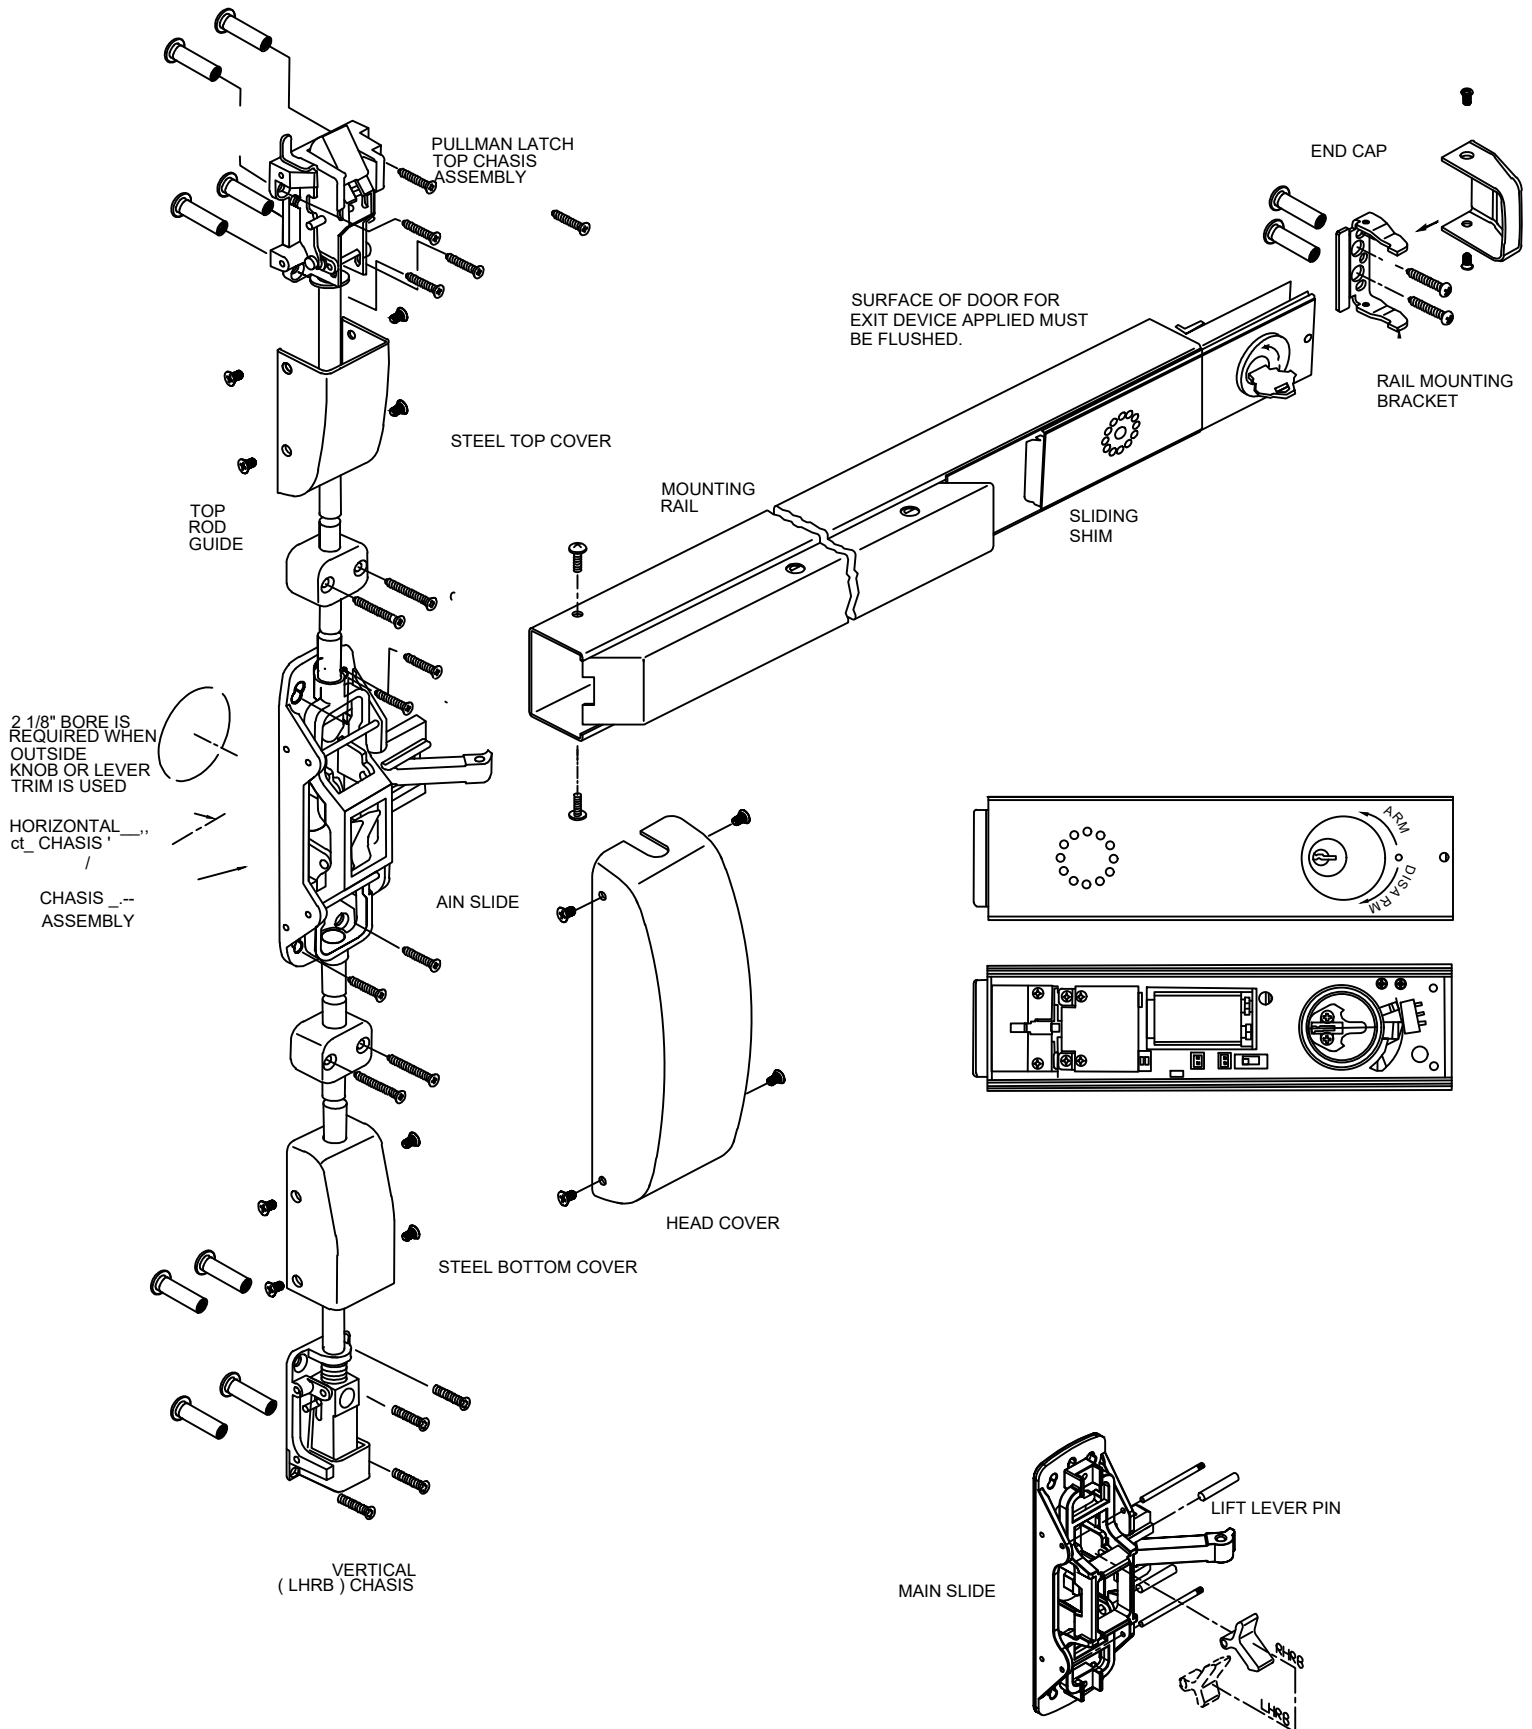

# INSTALLING NEW LOUDER SIREN ALARM KITS

## APPLICABLE TO A2260V AND A9860V SERIES EXIT DEVICE

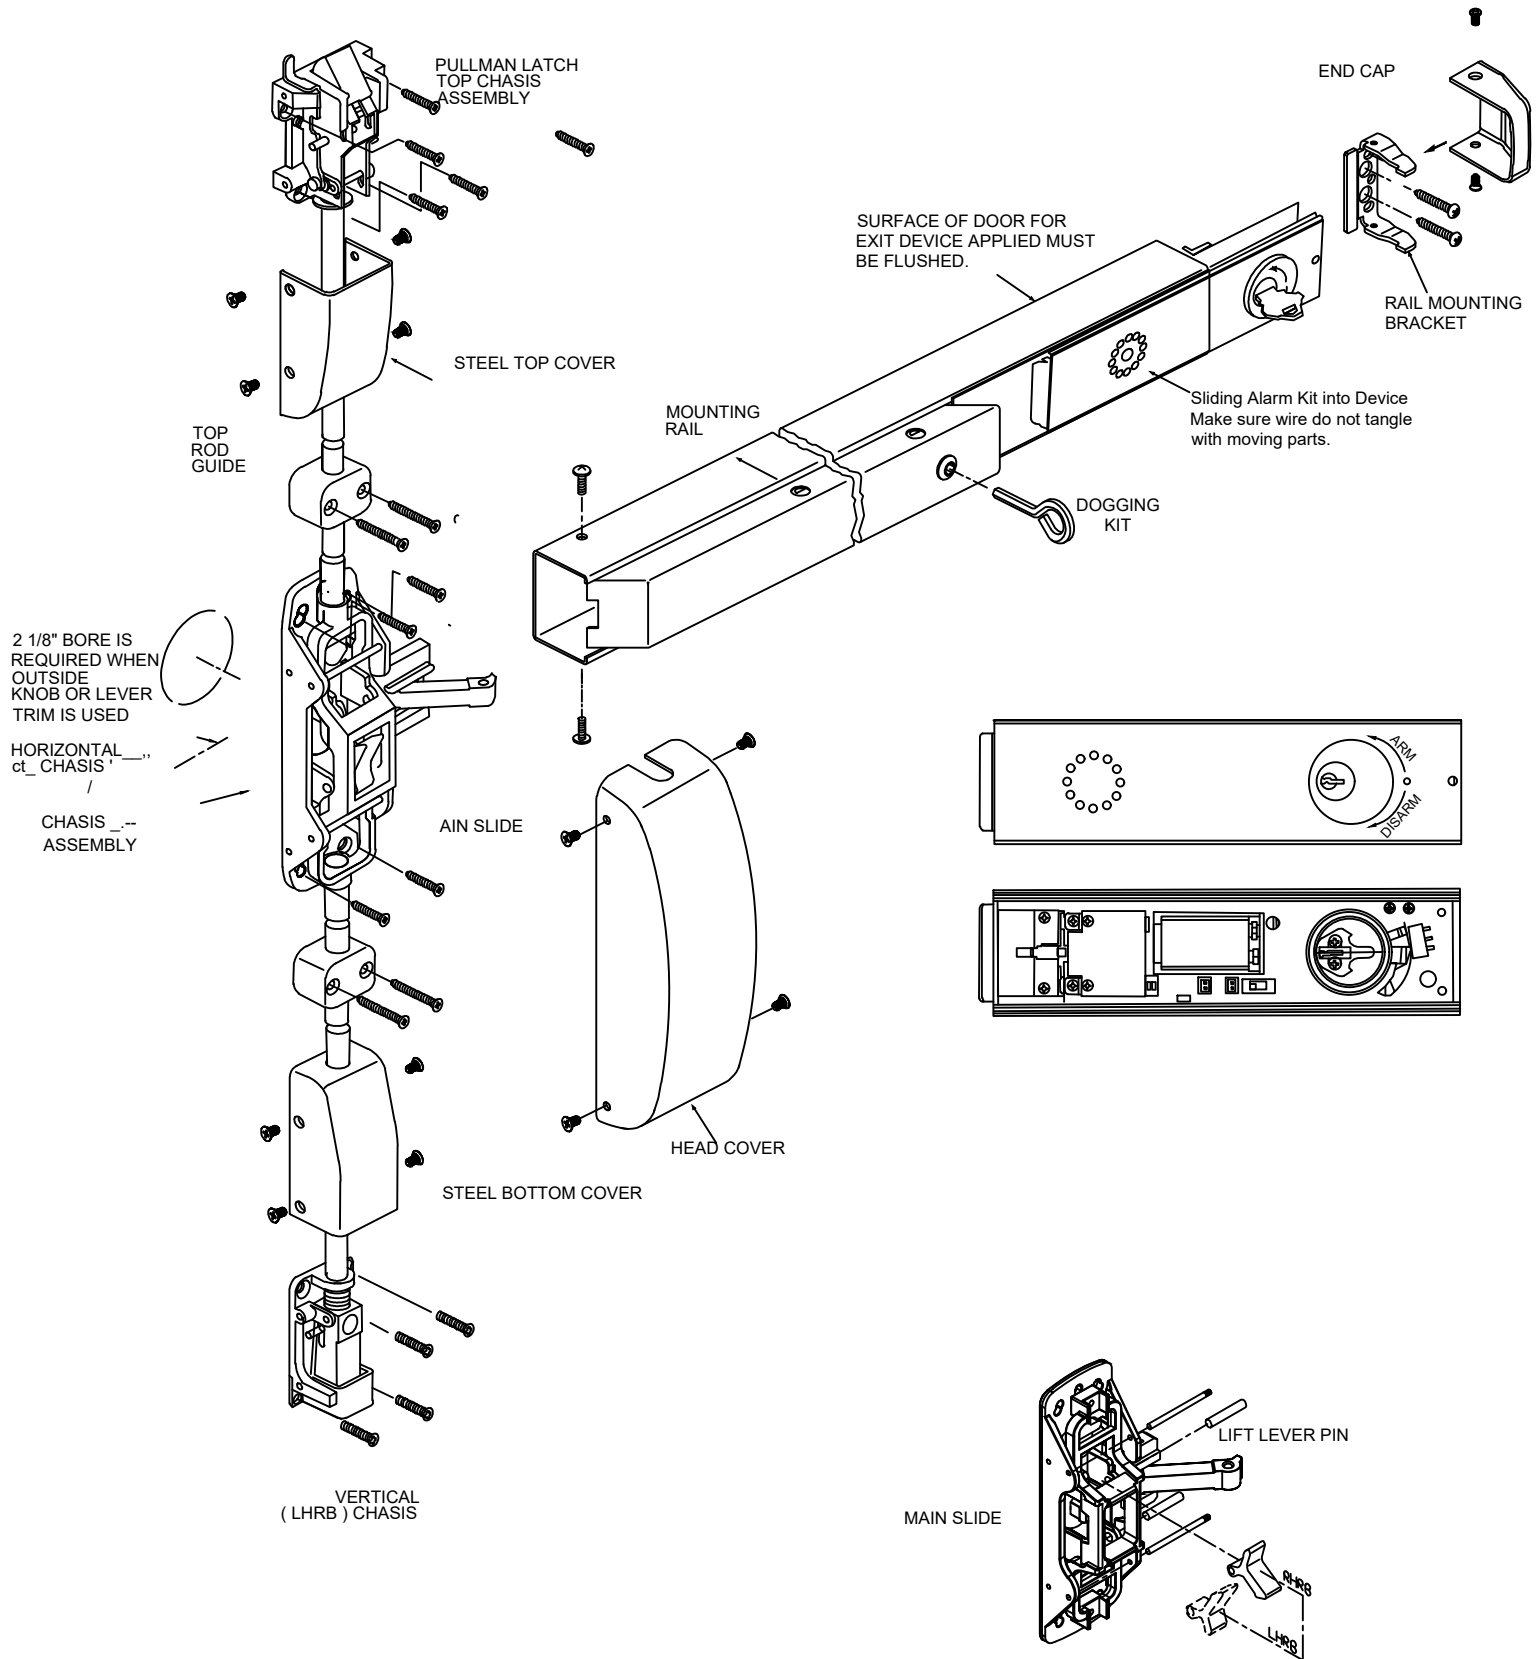

## SVR Type Exit Devices:

- 1.A2260V / A9860V Alarm SVR type 36" door (panic grade).
- 1.A2260V / A9860V Alarm SVR type 48" door (panic grade).
- 1.AF2260V / AF9860V Alarm SVR type 36" door (fire grade).
- 1.AF2260V / AF9860V Alarm SVR type 48" door (fire grade).

## Dimensions:

Alarm units has an internal horn. when the push rail is depresses, the horn sound to provide an means of signaling that the door has been opened and violated.

The unit has changeable " 1 / 3 / 5 / no limit " minute, alarm cut off or manual reset. Preset at factory for 1 minute alarm cut off.



The key switch to turn the alarm off is a standard 1-1/4" cylinder with "C" keyway. The alarm operates on one standard 9 volts transistor battery. when battery is weak the horn will emit an intermittent signal.

Alarm unit supplied with a switch to monitor push rail, latchbolt are secured by guardbolt design.

Unit includes " EMERGENCY EXIT ONLY ALARM WILL SOUND " decal for application on door or unit.



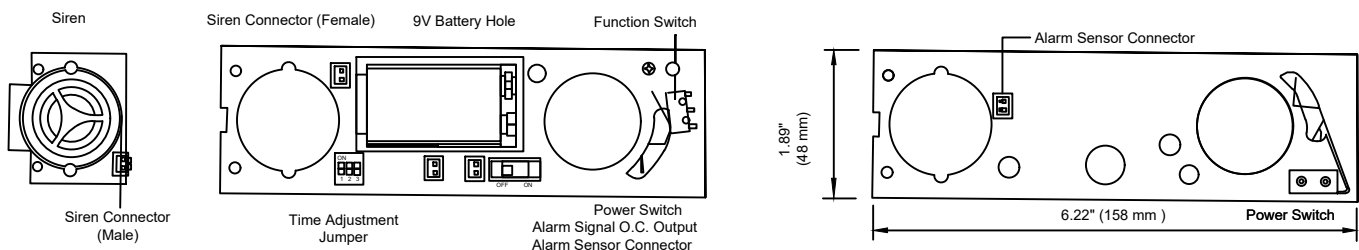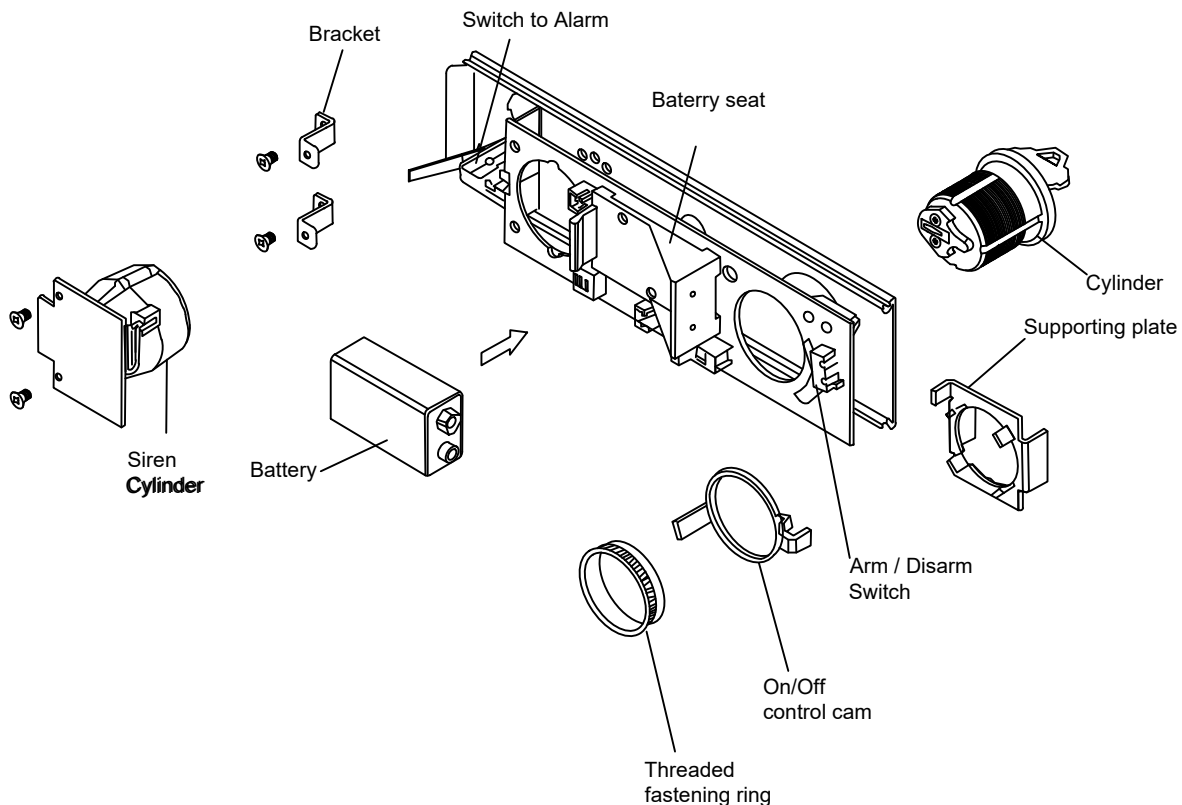

## INSTALLATION INSTRUCTION FOR A2260V / AF2260V & A9860V / AF9860V SERIES ALARMING DEVICE



1.Assembly Alarming kit with parts as shown below:



### 1-1.Operation:

- (1).Place the 9V 6Lr61 lithium battery onto the panel and turn on power switch.
- (2).To adjust the alarm time, kindly set the jumper as shown below:

Alarm time	Jumper Setting	Figure
1 Min.	DIP1 set	
	DIP2 and DIPS not set	
3 Min.	DIP2 set	
	DIP1 and DIP3 not set	
5 Min.	DIP3 set	
	DIP1 and DIP2 not set	
No Limit	DIP1 , DIP2 , DIP3 not set	



- 2.Cut the device and/or Sliding shim (end opposite Cyl. hole) to proper length.
- 3.Install Device to door.
- 4.Then sliding in the Alarm kit.
- 5.Mount the Exit Device end cover.
- 6.Mount sign by peeling off the protective backing and sticking onto Push Rail.

### Operation Instruction:

- 1.Insert key into Cyl. and arm the unit by turning key Anti-clockwise to arm.
- 2.Depress push rail, alarm should sound immediately.
- 3.Turn key clockwise to Disarm.

### General Instruction:

- 1.Alarm unit has an internal horn. When rail pushed, alarm will sound.
- 2.Place the 9V lithium battery onto the panel and turn on powe switch.
- 3.The unit has changeable " 1 / 3 / 5 / no limits " minutes alarm cut or manual reset.  
Preset at factory fro 1 minutes alarm cut off.
- 4.Key switch to turn off the alarm. 1-1/4" cyl with "C" keyway. Clockwise turn Disarm, silence or deactivates the alarm. And anti-clockwise turn Arm.
- 5.Alarm operate with standard 9-volt transistor battery.
- 6.When low battery, a brief signal is emitted intermittently.
- 7.Alarm unit supplied with a mag reed switch. to monitor push rail latchbolt for full proof secured.
- 8.Unit includes Red " Emergency Exit only Alarm will sound " decal for application on door or unit.

