246 UNIVERSAL STRIKE

CAL-ROYAL PRODUCTS, INC.

INTEGRAL STOP APPLICATION

DRILL & C'SINK FOR (2) 1/4"
FLAT HEAD MACHINE SCREWS

9/16"

1/8"

1/2"

9/16"

℄ of latch bolt

3-5/16"

2-1/2" CTC

1-7/8"

7/8"

1-5/8"

2" MIN. STILE

FURNISHED WITH TWO 1/4-20 AND
TWO #10-24 MACHINE SCREWS

1/8 ± 1/32" THICKNESS OF FRAME
PLUS REINFORCEMENT

IF DOOR SILENCERS ARE USED ON THE DOOR FRAME,
DECREASE THIS DIMENSION ACCORDINGLY.
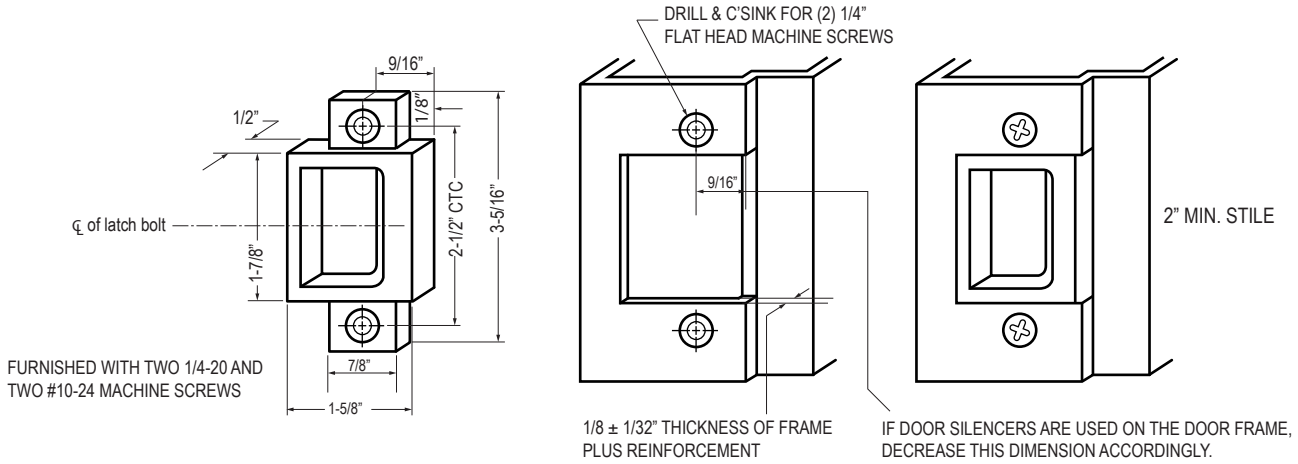
SINGLE DOOR

2-1/2" MIN. STILE

VERTICAL CENTERLINE OF MOUNTING HOLES

3/4"

3/16"

9/16" — IF DOOR SILENCERS ARE
USED ON THE DOOR
FRAME, DECREASE
THIS DIMENSION
ACCORDINGLY.

HORIZONTAL CENTERLINE OF
#10-24 MACHINE SCREW
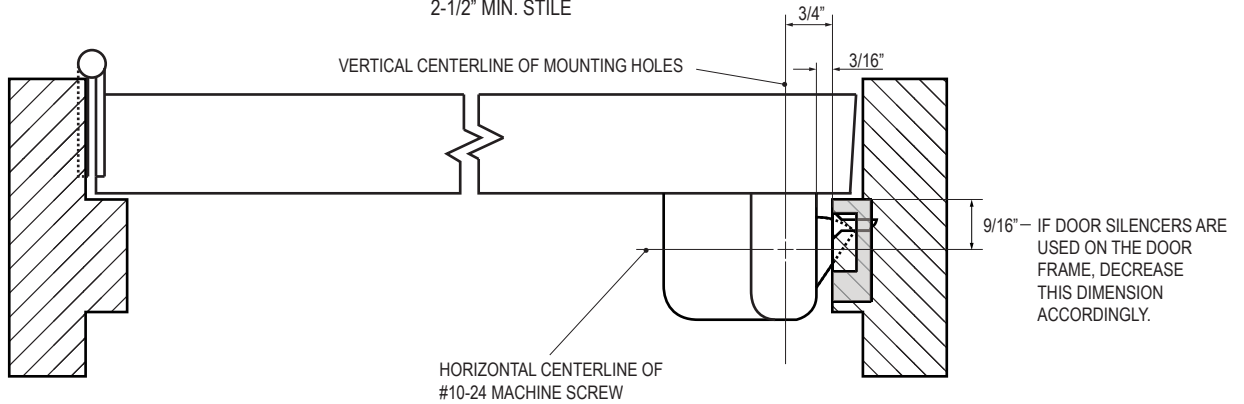
BLADE STOP APPLICATION

1-7/8" MIN. STILE

IF DOOR SILENCERS ARE
USED ON THE DOOR FRAME,
DECREASE THIS DIMENSION
ACCORDINGLY.

9/16"

2-1/2" CTC

BLADE STOP
1/8" WIDE X
1/2" HIGH

FOR ALUMINUM FRAMES
DRILL (2)-3/8" DIA HOLES
FOR USE WITH MOLLY
JACK NUTS. FOR REINFORCED
H.M. FRAMES DRILL & TAP
(2)#10-24 HOLES
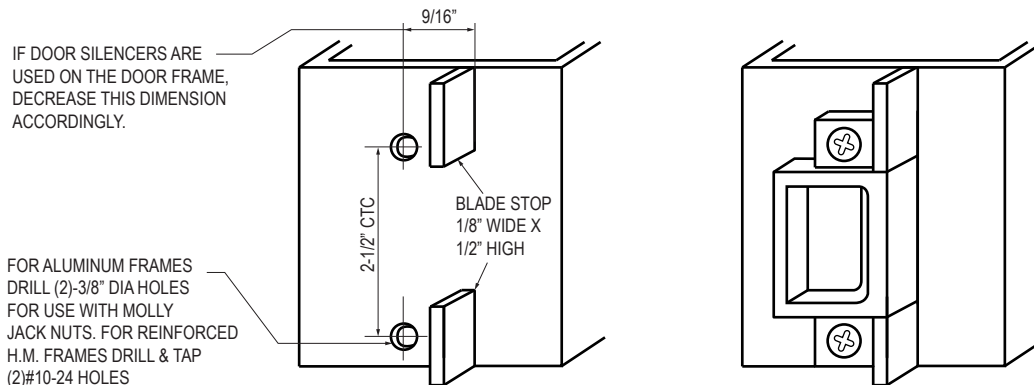
NOTES: FRACTIONAL TOLERANCE ± 1/64"
SEE METAL DOOR TEMPLATES TO MOUNT EXIT DEVICE.