

LSDC-315 SECURITY DOOR STOPS

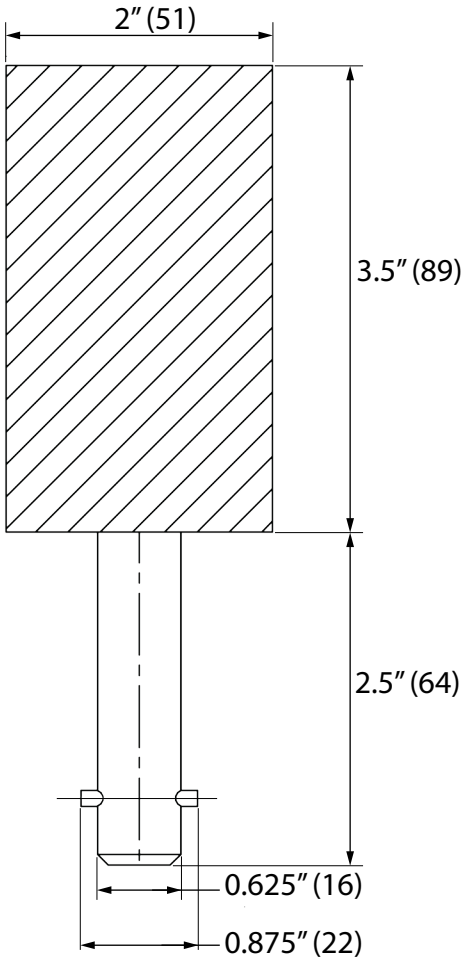


INSTALLATION INSTRUCTIONS:

1. OPEN DOOR AND MARK AT DESIRED LOCATION.
2. LOCATE MOUNTING HOLES ON FLOOR OR WALL.
3. DRILL 1″ (25mm) DIAMETER BY 2-3/4″ (70mm) DEEP HOLE.
4. REMOVE LOOSE MATERIALS FROM HOLE.
5. GROUT STOP INTO FLOOR OR WALL.

(WALL APPLICATION)
WALL STOP FLUSH WITH WALL

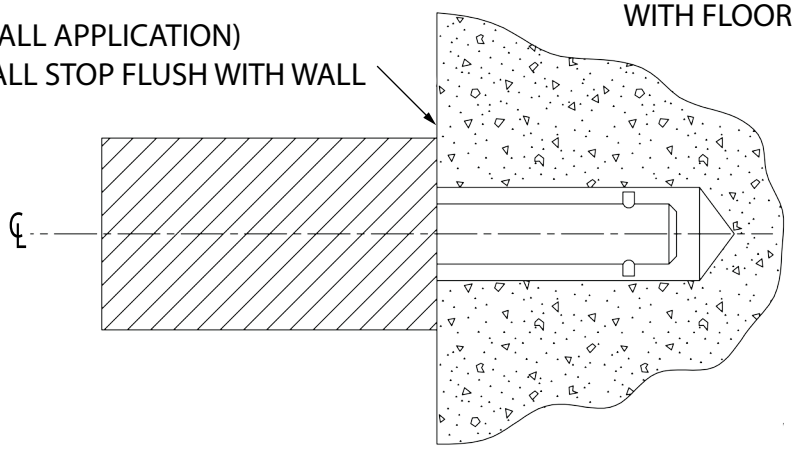

(FLOOR APPLICATION)
FLOOR STOP FLUSH
WITH FLOOR

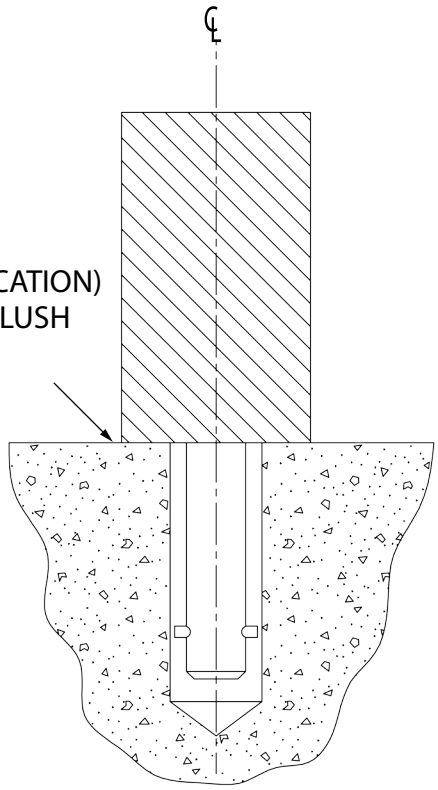

CAL-ROYAL PRODUCTS, INC.
6605 Flotilla St.
City of Commerce
CA 90040 USA
Tel: (323) 888-6601
FAX: (323) 888-6699
Website: cal-royal.com
Email: sales@cal-royal.com

ITEM NO.:	DESCRIPTION:	SCALE:
LSDC-315	Security Door Stops, 3.5” Projection FOR FLOOR OR WALL APPLICATIONS	NOT TO SCALE

ANSI:	UNIT:	VERSION:	BY:
--	inches(mm)	ver. 1, rev.0	adg/cmt