T300 SERIES
MAXIMUM SECURITY HEAVY DUTY DEADBOLTS
FOR COMMERCIAL AND RESIDENTIAL APPLICATIONS
ANSI A156.36, GRADE 2

c UL us
3 HOUR FIRE RATED
UL10C, UBC7-2-1997

LIFETIME WARRANTY

MEETS
The Buy American Act

Meets ADA requirements
Specially designed for Barrier Free Application
Conforms with BHMA / ANSI A156.36, Grade 2 Requirements, Exceeds 150,000 Cycles

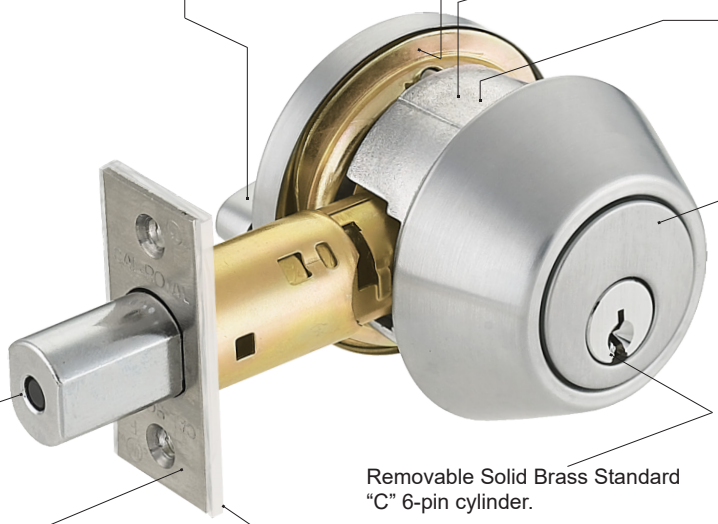

T360 SERIES
SINGLE CYLINDER

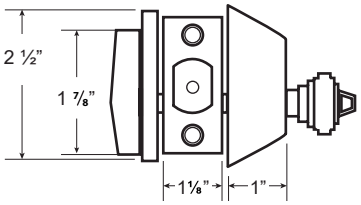

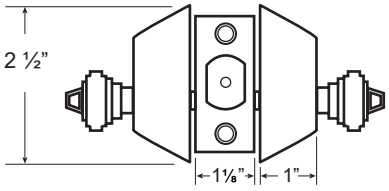

T362 SERIES
DOUBLE CYLINDER

HURRICANE APPROVED HARDWARE
FLORIDA BUILDING CODE
FL13922-R9
ASTM E330-02 & E1886-05/1996-06
TAS 201, 202, 203-94
UL10C-09

HURRICANE APPROVED HARDWARE
TEXAS EVALUATION ID
DR-472
ASTM E330-14/ E1886-13a/ E1996-14a

CONFIGURATION	MAX FRAME DIMENSIONS	DESIGN PRESSURE (PSF)			
		INSWING		OUTSWING	
		POSITIVE	NEGATIVE	POSITIVE	NEGATIVE
SINGLE	40" x 88"	+55.0	-55.0	+80.0	-80.0
SINGLE	52" x 98"	N/A	N/A	+80.0	-80.0
DOUBLE	76" x 88"	+55.0	-55.0	+55.0	-55.0

SPECIFICATIONS

TRIM
Wrought Brass or Stainless Steel.

DOOR RANGES
Adjustable 1 ⅜" (35mm) to 1 ¾" (45mm) door thickness. Optional 2 ¼" thick doors. Specify conversion kit for single (CONV T360) or double (CONV T362) Cylinder.

BACKSET
Adjustable UL Listed 3 Hour Fire Rating 2 ⅜" or 2 ¾" latch bolt.

DEADBOLT FACEPLATE
Standard 2 ¼" X 1" packed with ⅛" plastic filler to convert 1" face plate to 1 ⅛" wide door preparations.

BORE DIAMETER
1" for latch, 2 ⅛" for lock housing.

STRIKE
1 ⅛" x 2 ¾" square corner. Extra security 1" throw bolt with ¼" free spinning anti-cut through pin. 2 pcs x 3" screws with wood frame reinforcer greatly strengthens door frames.

KEYWAYS
6 pin solid brass "C" keyway standard. Schlage E, Schlage C-K, Russwin D1-2-3-4, Corbin 59 / 60, Corbin-Russwin L4, Sargent LA-LB-LC, Falcon / Weiser E, Arrow A, Yale 8, Yale GA and Kwikset. Can also accept Medeco, Assa, Kaba and Cal-Royal (HSK) High Security Cylinders.

INTERCHANGEABLE CORE
- Interchangeable Core locks will accept compatible 6 or 7-Pin cores with BEST, FALCON and ARROW.
- Interchangeable Core locks will also accept SCHLAGE full size Large format OEM interchangeable core cylinders and compatible Schlage 6-pin Interchangeable Core. Interchangeable Core offered by Cal-Royal Products, Inc.

Cal-Royal Products, Inc. reserves the right to, and may, on occassions, make changes and/or improvements in design, dimensions and technical specifications without prior notice.

T300 SERIES FINISHES AND FUNCTIONS

FINISHES AVAILABLE		
BHMA SYMBOL	US CODE	DESCRIPTION
622	US1	Flat Black Coated
605	US3	Polished Brass
606	US4	Satin Brass
609	US5	Antique Brass
612	US10	Satin Bronze
613	US10B	Oil Rubbed Bronze
613E	US10BE	Dark Satin Bronze, Equivalent
619	US15	Satin Nickel
625	US26	Polished Chrome
626	US26D	Satin Chrome
630	US32D	Satin Stainless Steel

Refer to price list for stock finishes and functions

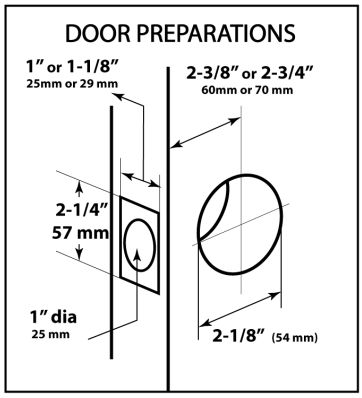

LIFETIME WARRANTY

HURRICANE APPROVED HARDWARE
FLORIDA BUILDING CODE
FL13922-R9
ASTM E330-02 & E1886-05/1996-06
TAS 201, 202, 203-94
UL10C-09

HURRICANE APPROVED HARDWARE
TEXAS EVALUATION ID
DR-472
ASTM E330-14/ E1886-13a/ E1996-14a

CONFIGURATION	MAX FRAME DIMENSIONS	DESIGN PRESSURE (PSF)			
		INSWING		OUTSWING	
		POSITIVE	NEGATIVE	POSITIVE	NEGATIVE
SINGLE	40" x 88"	+55.0	-55.0	+80.0	-80.0
SINGLE	52" x 98"	N/A	N/A	+80.0	-80.0
DOUBLE	76" x 88"	+55.0	-55.0	+55.0	-55.0

c UL us
3 HOUR FIRE RATED
UL10C, UBC7-2-1997

MEETS
The Buy American Act

ULT360
ICULT360
SCICULT360
ANSI E0152



Heavy Duty Single Cylinder Deadbolt
Deadbolt thrown or retracted by key from outside or by inside turn unit. Bolt automatically deadlocks when fully thrown.

ULT362
ICULT362
ANSI E0142



Heavy Duty Double Cylinder Deadbolt
Deadbolt thrown or retracted by key from either side. Bolt automatically deadlocks when fully thrown.

CL600
ICCL600
ANSI E0172



Classroom Deadbolt Lock
Deadbolt thrown or retracted by key from outside. Inside turn unit will retract bolt only. Bolt automatically deadlocks when fully thrown.
(fixed 2 ¾" latch bolt standard; specify 2 ⅜" backset option)

ULT700
ICULT700
ANSI E1161



One Way Dead Bolt WITH INTERNAL PLATE
Deadbolt thrown or retracted by key only. Bolt automatically deadlocks when fully thrown. Blank plate inside (exposed screws).

ULID363



One Sided Dead Bolt
Deadbolt thrown or retracted by turn unit only. No outside trim. Bore halfway through door for installation visible from one side of door only.

ULID365



One Sided Dead Bolt WITH EXTERNAL PLATE
Deadbolt thrown or retracted by turn unit only. Blank plate is on external trim to be used on bore holes 2 ⅛" wide.

OTHER FUNCTIONS NOT LISTED ARE AVAILABLE UPON REQUEST

- "IC" Indicates functions available with Interchangeable Core compatible with 6 or 7-Pin cores by Best, Falcon and Arrow.
- "SCIC" Indicates functions available with Schlage Full Size Large Format Interchangeable Core.

Cal-Royal Products, Inc. reserves the right to, and may, on occassions, make changes and/or improvements in design, dimensions and technical specifications without prior notice.