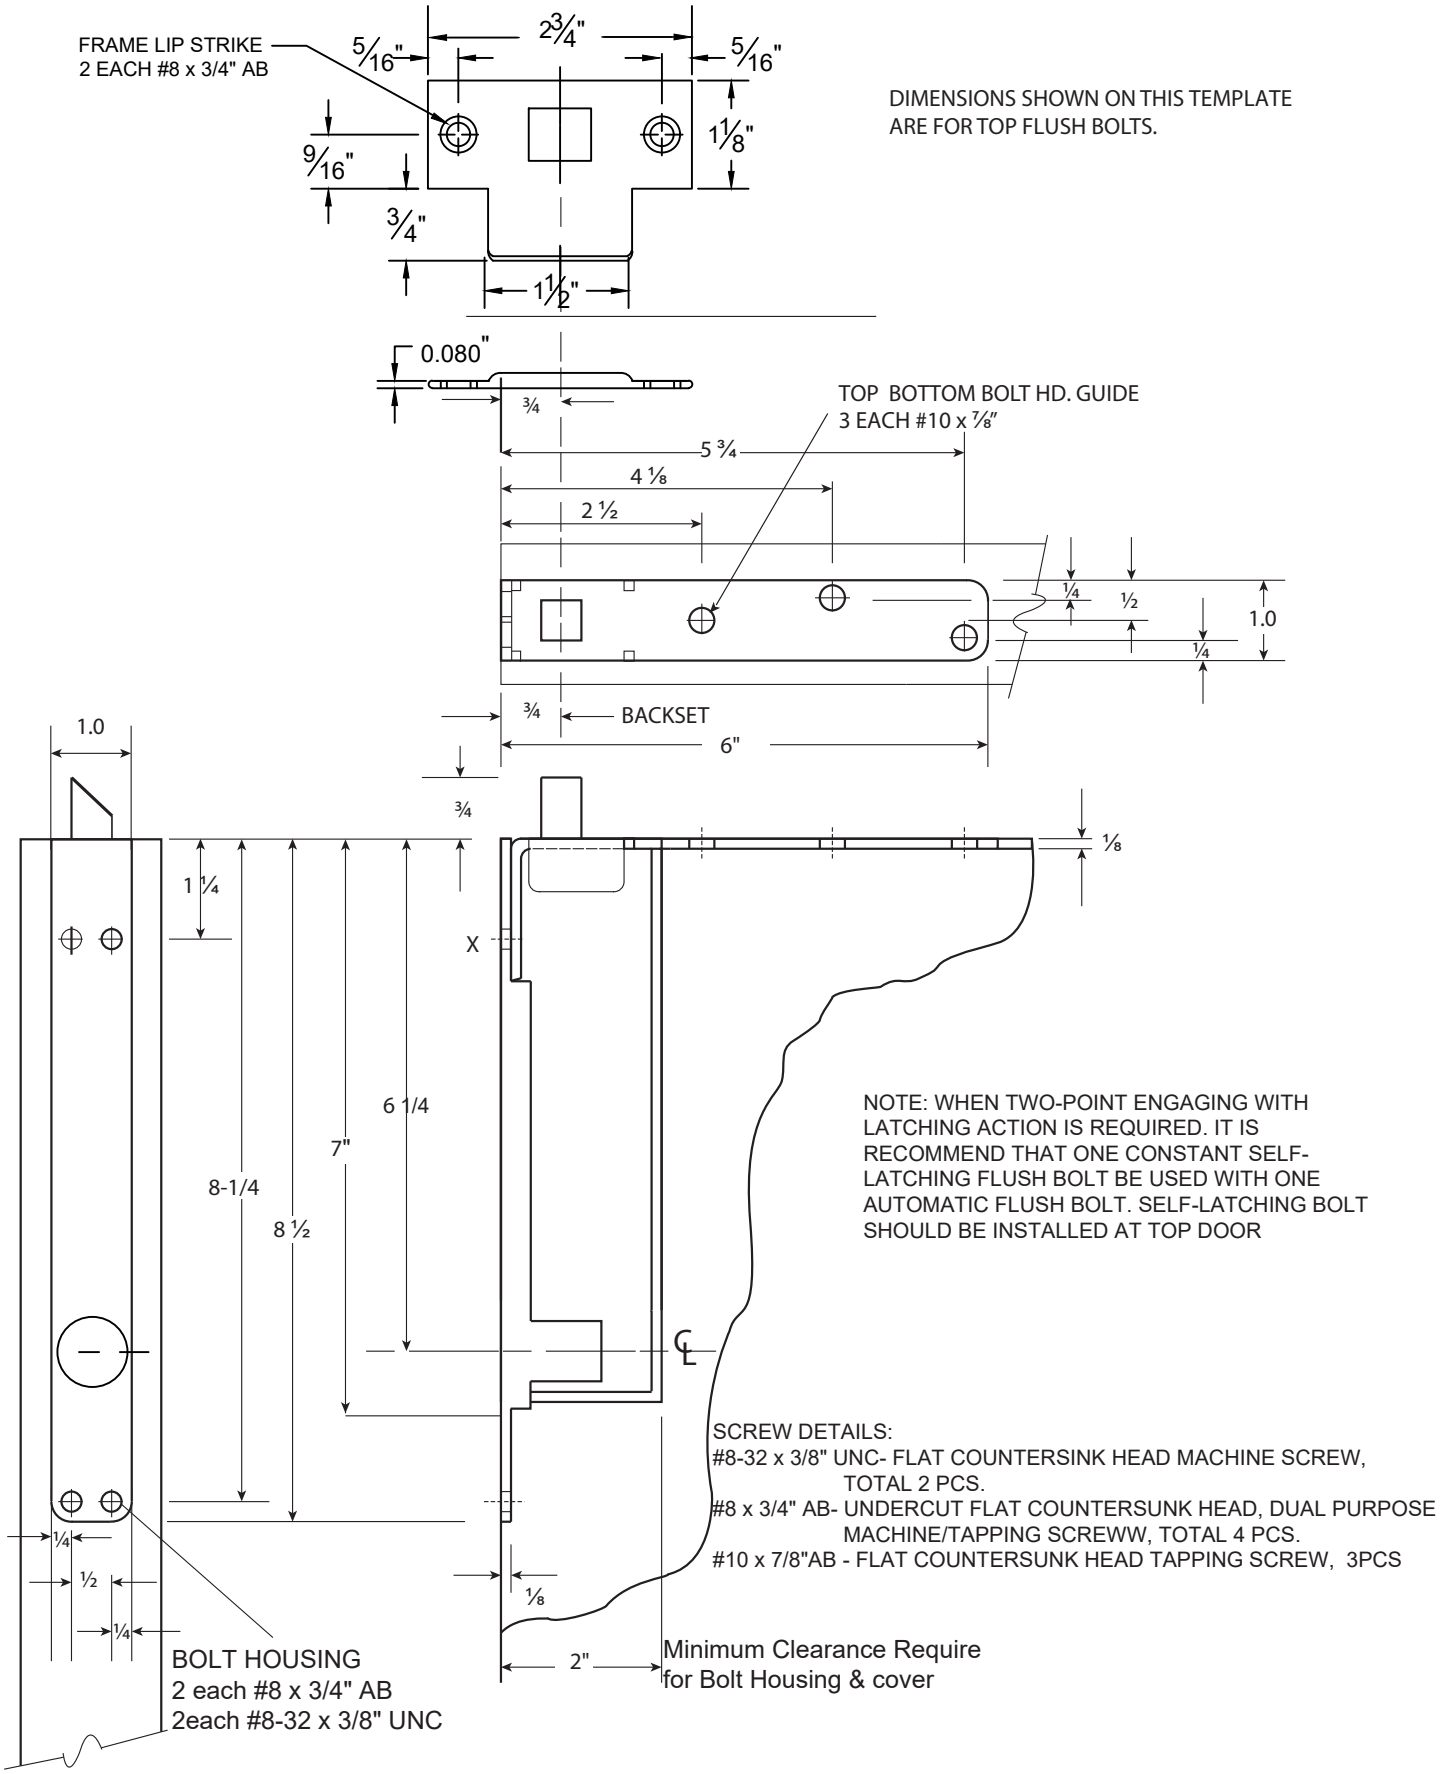


(The short screws are seated into holes of bolt housing as shown mark X. where faces the Bolt Extension Rod)

CAL-ROYAL PRODUCTS, INC. USA

SLAUTOFLW4

CONSTANT LATCHING FLUSH BOLT FOR WOOD DOOR APPLICATION

NOT TOSCALE

DWG NO. BHT-7603-02/26-1of2

Version : 1.0


ILLUSTRATION AND TECHNICAL DESCRIPTION OF THIS TEMPLATE IS FOR STANDARD INSTALLATION ONLY
CUSTOM APPLICATIONS WILL BE UNDER THE INSTALLERS DISCRETION.

SCREW DETAILS:

Bolt Housing :2 - #8 x ¾ flat head sheet metal/machine screws
2 - #8-32 x ⅜" flat head sheet metal screws

Frame & Sill Strike :2 - #8 x ¾" flat head sheet metal/machine screws
Reversible Bolt Guide:2 - #8 x ¾" flat head sheet metal/machine screws
Active Door Strike :2 - #8 x ¾" flat head sheet metal/machine screws

BOLT HOUSING
2 EACH #8 x ¾"
2 EACH #8-32 x ¼ "

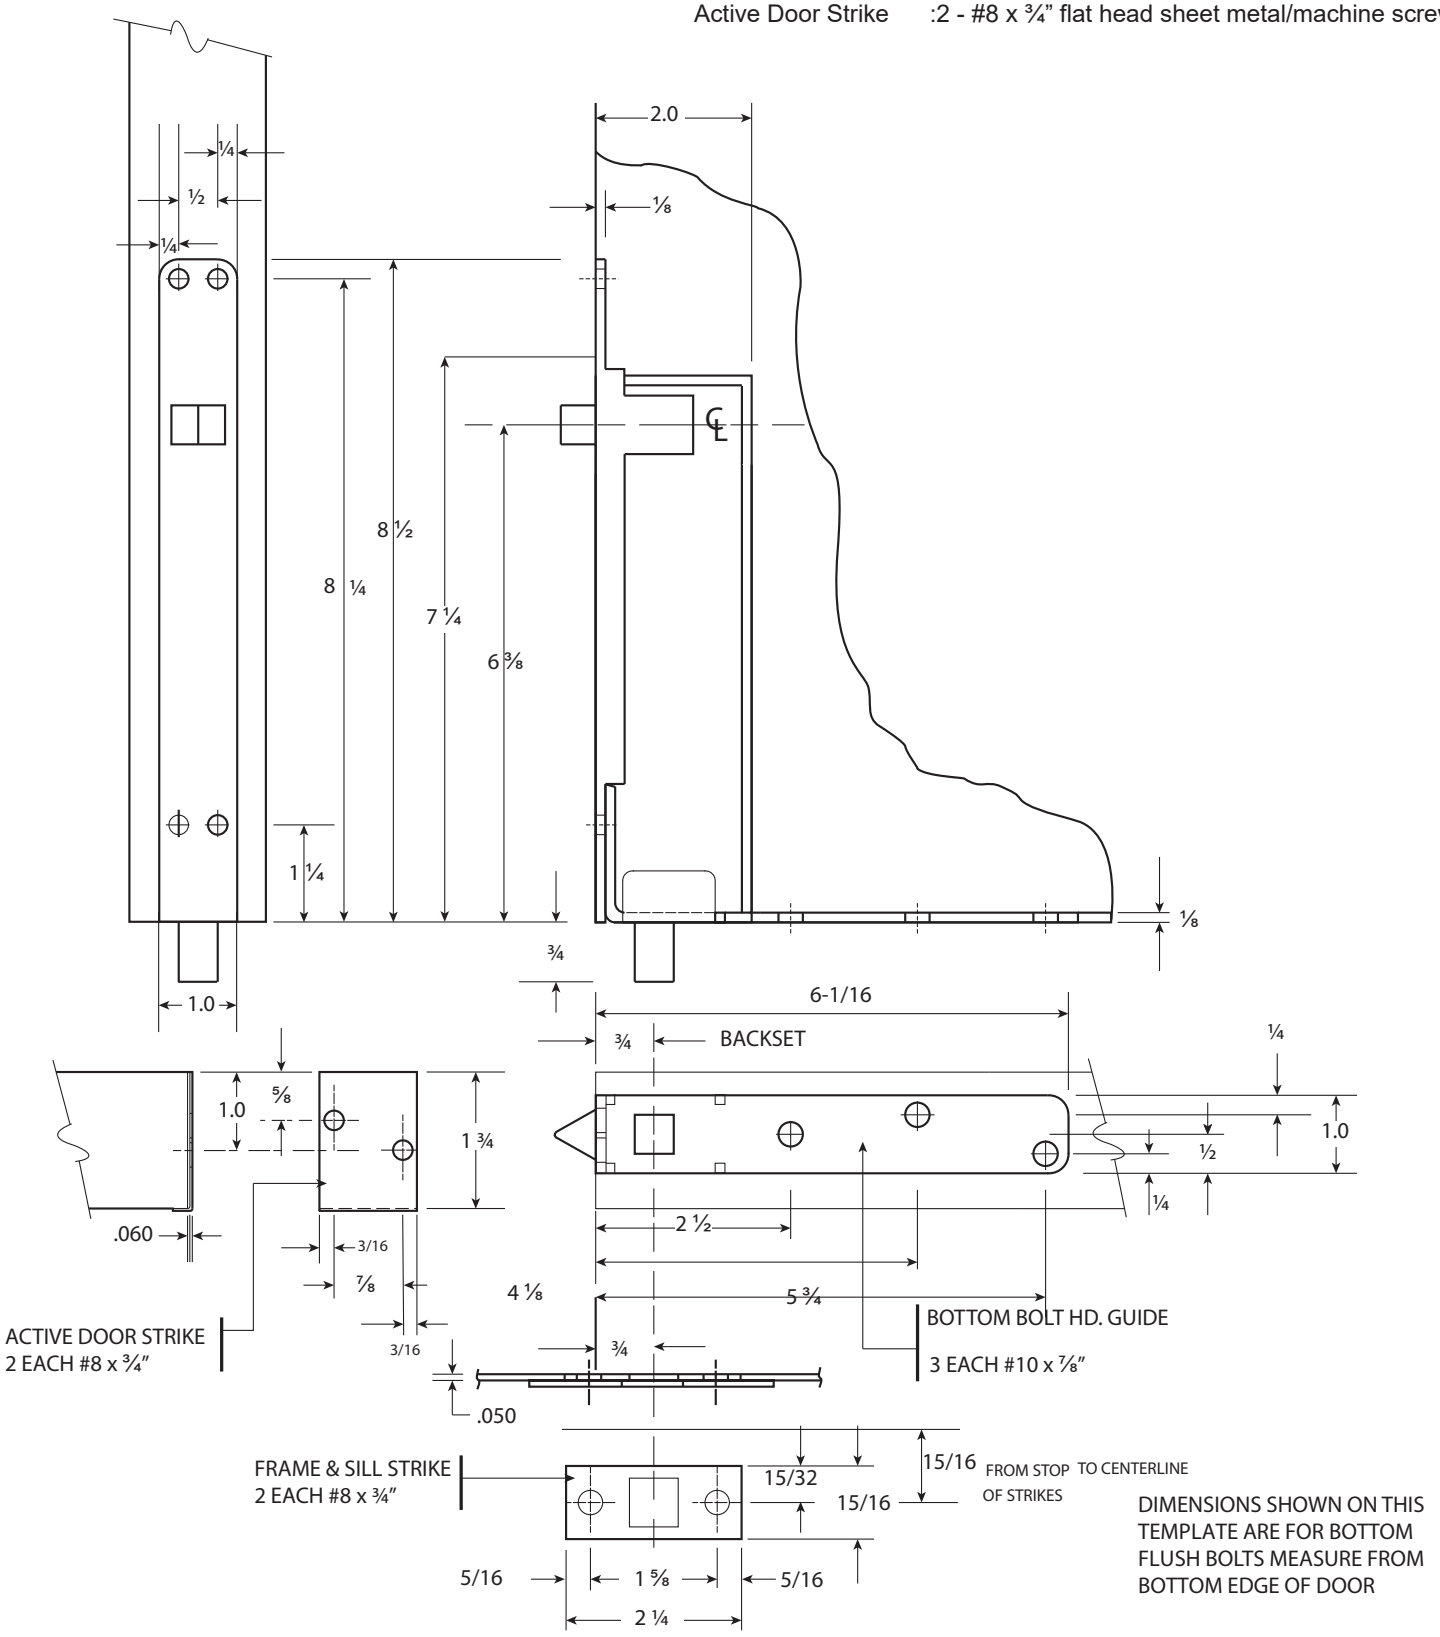

DIMENSIONS SHOWN ON THIS TEMPLATE ARE FOR BOTTOM FLUSH BOLTS MEASURE FROM BOTTOM EDGE OF DOOR

CAL-ROYAL PRODUCTS, INC. USA

AUTOFLW-22

AUTOMATIC FLUSH BOLT FOR WOOD DOOR APPLICATION

ILLUSTRATION AND TECHNICAL DESCRIPTION OF THIS TEMPLATE IS FOR STANDARD INSTALLATION ONLY CUSTOM APPLICATIONS WILL BE UNDER THE INSTALLERS DISCRETION.

NOT TOSCALE

DWG NO.
BHT-7603-02/26-2of2

Version : 1.0