

5000V & F5000V Series




GRADE 1 Vertical Rod Type Exit Device



LIFETIME WARRANTY

Specifications

| | |
|--------------------------------------|---|
| For Doors..... | 1 3/4" thick standard. 3 3/4" minimum stile width required for single door application. 3 1/2" minimum stile width required for double door application. Lever and knob trims available |
| Top & Bottom Chassis..... | Steel (Panic Grade), Steel (Fire Grade) |
| Cover..... | Covers stock hollow metal doors with 161 cutout |
| Mounting..... | Furnished standard with wood and machine screws. Thru-bolts are standard packaging on fire rated devices |
| End Cap..... | Steel construction |
| Hand..... | Non-Handed |
| Latch Bolt & Spring..... | Stainless steel |
| ANSI Standard..... | A156.3, Grade 1 |
| Rail Assembly..... | Heavy gauge steel, painted |
| Strike..... | See strike page |
| Dogging Feature..... | 5mm Allen-type key furnished standard on non-fire labeled devices |

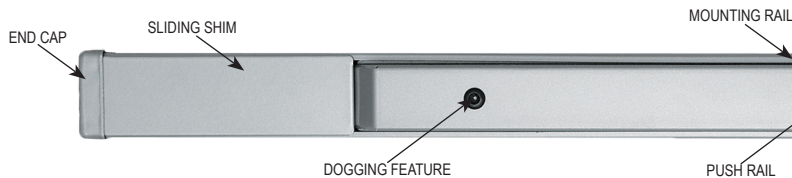


4 1/2" Minimum Stile Requirements

| | |
|------------------------------------|---|
| UL and ULC Listed..... | 5000V Series for panic. F5000V Series for fire exit hardware for all types of 6' x 7' double doors for up to 3 hour fire labeled installations. Conforms to standards UL10C and UBC 7-2-1997 codes. |
| Finish..... | Aluminum (Alum), US32D Stainless Steel |
| Anti-Microbial Coating..... | Available on US32D only. Use part # ANTB-EXIT |
| Door size..... | 5000V3684 and F5000V3684 for 36" x 84" doors |


DIMENSIONS

| | | | |
|---|--|---------------------|-----------------------|
| Touchbar height to finished floor | 41" (1041 mm) at center | | |
| Touchbar projection | Neutral | 2 1/2" (64 mm) | |
| | Depressed | 1 3/4" (45 mm) | |
| Panic grade top & bottom latch case | 8 1/16" x 2 3/4" x 2 1/2" (205 mm x 70 mm x 63 mm) | | |
| Fire grade top latch case | 3 15/16" x 2 11/16" x 2 1/16" (100 mm x 68 mm x 52 mm) | | |
| Fire grade bottom latch case | 3 15/16" x 2 1/8" x 1 3/8" (100 mm x 54 mm x 35 mm) | | |
| Top and bottom rod length for 36" x 84" doors | Top rod 38" (965 mm), Bottom rod 37 1/2" (953 mm) | | |
| Vertical rods | 1/2" (13 mm) Round tubing | | |
| MODEL | ACTUAL LENGTH | MAX CUT DOWN | DOOR SIZE |
| 5000V3684 | 32" | 6" | 36" to 84" door width |
| F5000V3684 | | | |

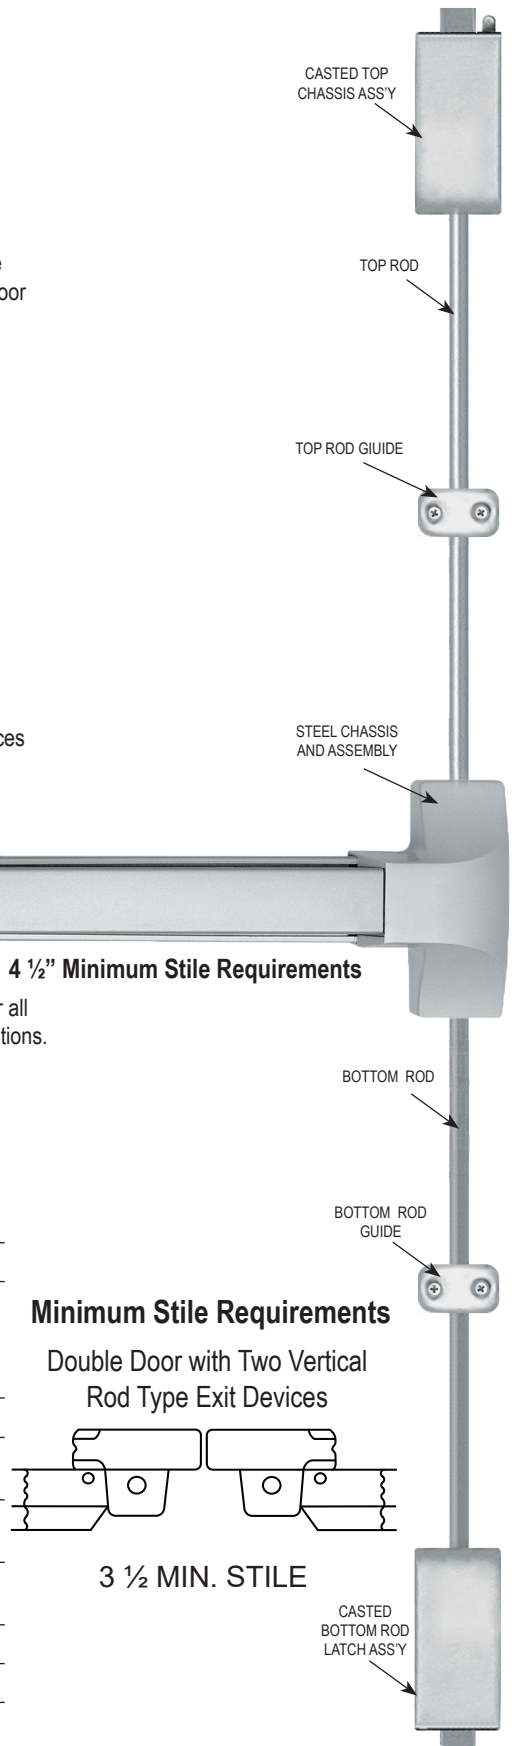

Minimum Stile Requirements

Double Door with Two Vertical Rod Type Exit Devices



3 1/2 MIN. STILE