

ALBR2260V & ALBRF2260V ADA Series

GRADE 1 Vertical Rod Exit Device Less Bottom Rod (LBR)




| | | | | |
|--------------------------|--|---|---------------|---|
| LIFETIME WARRANTY | BHMA CERTIFIED Be Safe. Be Secure. Look for the Mark. | MEETS <i>The Buy American Act</i> | ADA COMPLIANT | UL US 3 HOUR FIRE RATED UL10C, UBC7-2-1997 |
|--------------------------|--|---|---------------|---|

Specifications

| | |
|-------------------------------------|--|
| LBR | No Bottom Strike. Free access for wheel chairs, stretcher and carts therefore eliminates tripping potential and disfiguration of floors due to dragging of bottom bolts |
| For Doors | 1 3/4" thick standard. 3 3/4" minimum stile width required for single door application. 3 1/2" minimum stile width required for double door application. Lever trims available. 2 3/4" backset |
| Top Chassis | Non-ferrous Alloy (Panic Grade), Steel (Fire Grade) |
| Cover | Non-ferrous Alloy. Covers stock hollow metal doors with 161 cutout |
| Mounting | Furnished standard with wood and machine screws. Thru-bolts are standard packaging on fire rated devices |
| Alarm | Available. Prefix "NALRM" before MODEL # |
| End Cap | Steel Construction |
| Hand | Handed. Easily field reversible. Specify at time of order LHR, RHR for convenience |
| Latch Bolt, Spring | Stainless Steel |
| Auxiliary Spring Latch | Auxiliary spring loaded latchbolt is installed in the lower edge of the door, when exposed to fire latchbolt releases keeping the door closed and regulated |
| ANSI Standard | A156.3, Grade 1 |
| Rail Assembly | Heavy gauge steel, painted |
| Strike | See strike page |
| Dogging Feature | Allen-type key furnished standard on non-fire labeled devices |
| Electronic Functions | (ELR) Electrical Latch Retraction and RX & LX Signal Switch available |


***Americans with Disability Act (ADA) compliant**
5 lbs opening force on ADA Series only
***Refer to the Price List for Stock Sizes and Finishes**

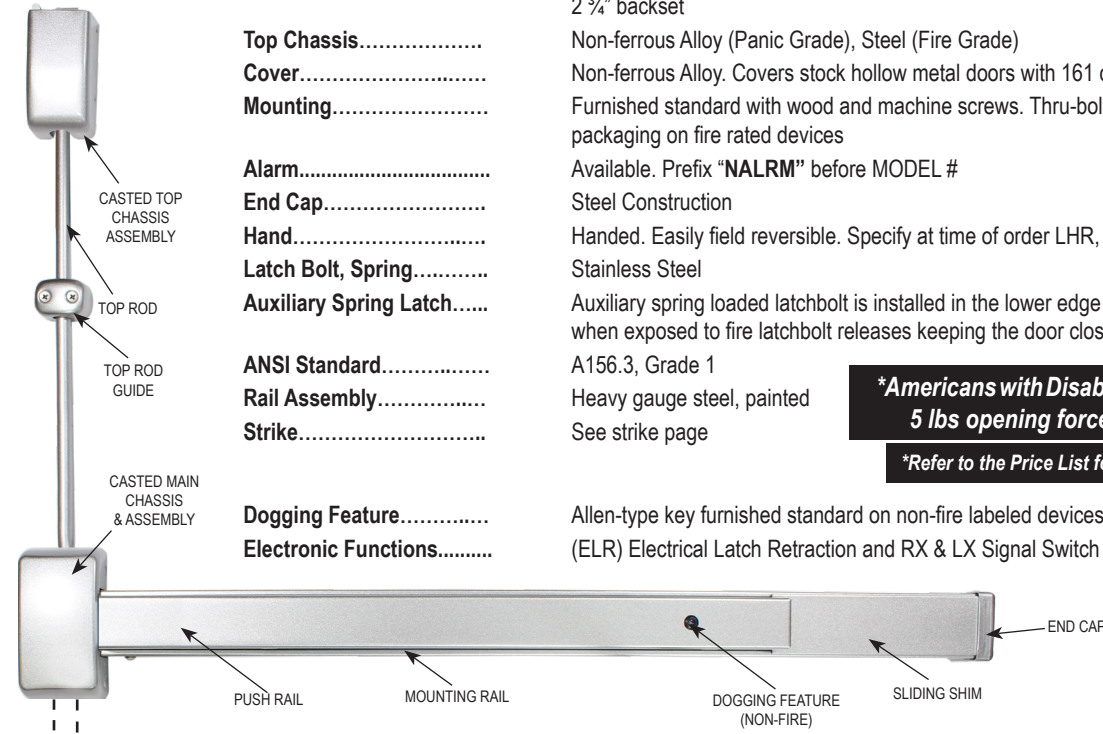

UL and ULC Listed..... All Series for panic. LBR Series for fire exit hardware for all types of 8' x 8' double doors including double egress for up to 3-hour metal, 1 1/2 hour wood doors fire labeled installations. Conforms to standards UL10C and UBC 7-2-1997 codes

DIMENSIONS

| | |
|---|--|
| Touchbar height to finished floor | 41" (1041 mm) at center |
| Touchbar projection | |
| Neutral | 2 1/2" (64 mm) |
| Depressed | 1 3/4" (45 mm) |
| Panic grade top & bottom latch case | 3 15/16" x 2 1/8" x 1 3/8" (100 mm x 54 mm x 35 mm) |
| Fire grade top latch case | 3 15/16" x 2 11/16" x 2 1/16" (100 mm x 68 mm x 52 mm) |
| Fire grade bottom latch case | 3 15/16" x 2 1/8" x 1 3/8" (100 mm x 54 mm x 42 mm) |
| Top and bottom rod length for 36" x 84" doors | Top rod 39 3/16" (995 mm) |
| Top and bottom rod length for 48" x 96" doors | Top rod 51 3/16" (1300 mm) |
| Vertical Rods | 1/2" (13 mm) Round tubing |



Auxiliary Fire Latch Assembly Included

| MODEL | ACTUAL LENGTH | MAX CUT DOWN | DOOR SIZE |
|--|---------------|--------------|-----------------------|
| ALBR2210V2484, ALBRF2210V2484 | 20" | 2" | 22" to 24" door width |
| ALBR2270V3284, ALBRF2270V3284 | 28" | 6" | 26" to 32" door width |
| ALBR2260V3684, ALBRF2260V3684, ALBR2290V3696, ALBRF2290V3696, ALBR2250V36120 | 32" | 6" | 30" to 36" door width |
| ALBR2280V4896, ALBRF2280V4896, ALBR2240V48120 | 44" | 12" | 36" to 48" door width |