


# LRC SERIES

## Grade 1 Heavy Duty Cylindrical Lockset with Ligature Resistant Lever



Meets ADA requirements  
Specially designed for Barrier Free Application  
Conforms with ANSI / BHMA A156.2, Series 4000,  
Grade 1 Requirements, Exceeds 1,000,000 Cycles



### SPECIFICATIONS


- For 1 3/8" to 2" thickness doors
- 2 3/4" Backset Standard, 2 1/4" x 1 1/8" Latch Faceplate,
- 2 3/8", 3 3/4", 5" and 2 3/4" Anti-Friction Latch Optional
- UL Listed, 1/2" Throw Solid Brass
- Reversible for RH or LH applications
- ASA Strike Standard
- Heavy Duty Stainless Steel Rose and Lever Trim
- Tamper Resistant Concealed Mounting Set Screws
- 6-Pin Solid Brass Schlage "C" Keyway Standard
- Small Format IC available combined or uncombined, 6 or 7 pin cores with BEST, FALCON, and ARROW. Prefix "IC" before part number.

### FEATURES

- For Behavioral and Health Care facilities
- Lever clutch free-wheeling design helps to prevent intentional or accidental hanging.
- The lever rotates when in locked or unlocked position to prevent excessive force and decreases the chance of the lever being broken or damaged
- Anti-vandal cylinder guard is standard, deters forcible removal of cylinder with any type of wrench or hammer
- Different functions available to satisfy individual security and safety requirements

### CERTIFICATIONS

- Meets ANSI / BHMA A156.2 Series 4000, Grade 1 Requirements
- UL and cUL listed to Canadian safety standard for A label (3-hour fire door); stamped letter "F" and UL symbol on armor faceplate
- Meets positive pressure requirements UL 10C and UBC 7-2 (1997)
- Meets requirements of the Buy American Act
- Meets requirements of the Americans with Disabilities Act

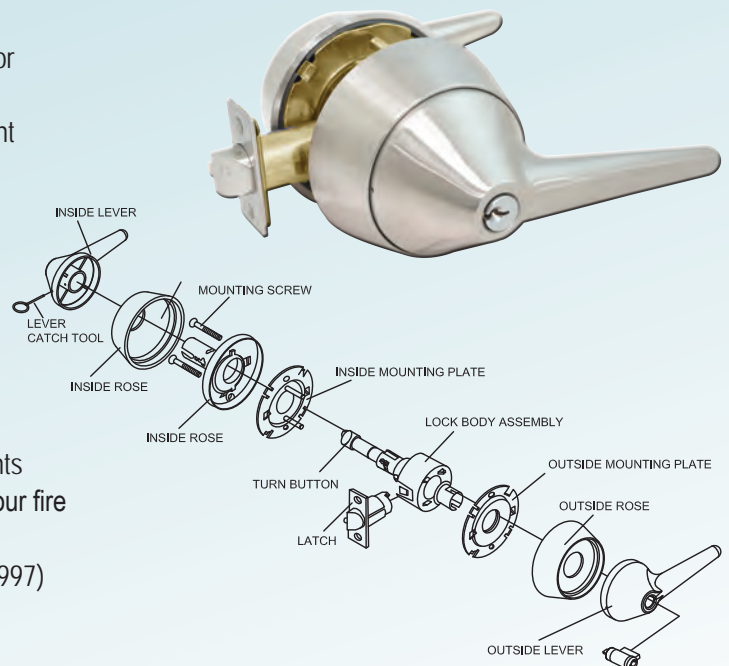

| FINISH AVAILABLE |         |                       |
|------------------|---------|-----------------------|
| BHMA SYMBOL      | US CODE | DESCRIPTION           |
| 630              | US32D   | Satin Stainless Steel |



| OUTSIDE | INSIDE | SERIES/FUNCTION    | TYPE                   | ANSI | FUNCTION DESCRIPTION  |
|---------|--------|--------------------|------------------------|------|---|
|         |        | LRC00<br>ICLRC00   | Entrance / Office Lock | F109 | Turn / Push button locking. Pushing and turning button locks outside lever requiring use of key until button is manually unlocked. Pushing button locks outside lever until unlocked with key or inside lever is turned.  |
|         |        | LRC02<br>ICLRC02   | Storelock              | F91  | Dead locking latch bolt operated by lever from either side, except when both levers are locked by key in lever from either side.  |
|         |        | LRC03<br>ICLRC03   | Classroom              | F84  | Dead locking latch bolt operated by lever from either side except when outside lever is locked from outside by key. When outside lever is locked, latch bolt is operated by turning inside lever.   |
|         |        | LRC04<br>ICLRC04   | Communicating          | F80  | Dead locking latch bolt operated by lever from either side. Turning key in either lever locks or unlocks its own lever independently.   |
|         |        | LRC05<br>ICLRC05   | Storeroom              | F86  | Dead locking latch bolt operated by key in outside lever or by rotating inside lever. Outside lever is always fixed.  |
|         |        | LRC06<br>ICLRC06   | Vestibule              | F88  | Dead locking latch bolt operated by lever from either side except when outside lever is locked by key from inside. Latch bolt may be retracted by key in outside lever or by rotating inside lever.   |
|         |        | LRC07<br>ICLRC07   | Classroom Intruder     | F110 | Latch bolt is operated by rotating the inside lever, or rotating the outside lever only when not locked from the inside or outside key. Outside lever is locked and unlocked by turning the key inside or outside lever. Inside lever cannot be locked.   |
|         |        | LRC09<br>ICLRC09   | Institution            | F87  | Dead locking latch bolt operated by key in lever from either side. Both lever always fixed.   |
|         |        | LRC101<br>ICLRC101 | Dormitory              | F90  | Dead locking latch bolt operated by lever from either side except when outside lever is locked by key or by push button on inside lever. Key in outside lever locks or unlocks outside lever. Outside key releases push button when locked from inside. Rotating inside lever or closing the door releases push button. |
|         |        | LRC20              | Privacy                | F76  | Latch bolt operated by lever from either side. Outside lever is locked by push button inside and unlocked by emergency release outside. Turning inside lever or closing door releases push button.  |
|         |        | LRC30              | Passage                | F75  | Latch bolt operated by lever from either side at all times.   |
|         |        | LRC40              | Dummy                  | ---  | Single dummy trim for one side of door. Pull only.  |

● "IC" Indicates function available with BEST, FALCON & ARROW Interchangeable Core.