


EJHIL Series

DIGITAL TOUCH SCREEN / RFID / SMART CONNECT
INTERCONNECTED LOCK, GRADE 2




- Smart Connect Module (Optional)
- Mobile App for Android & Apple
- 1000 Audit Trail Entries

- 4-6 Digit Code Combination
- 500 RFID Card/Keyfob per lock
- Proximity RFID Card (13.56 MHz)
- RFID Keyfob (Optional)
- Master Code
- 500 User Codes per lock
- 2 One Time User Codes
- Passage Mode
- Weather Resistant
- 9V Battery Emergency Port
- Anti-Tamper Lock-Out
- Lock-Out Mode
- Non-Handed, Reversible
- Touch Screen to Wake Up Lock
- 2 Year Warranty

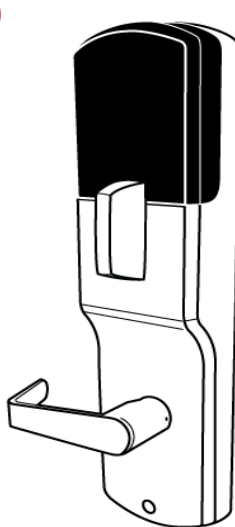


INSIDE UNIT

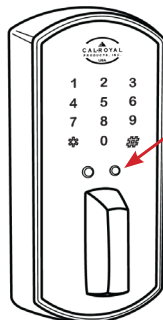



SG




9-Volt Battery Terminal




HOL




VEN



DOV



MAN



ROC

STOCK ITEM IN BOLD FINISH







NON-STOCK FINISHES AND DESIGNS AVAILABLE WITH FACTORY LEAD TIME AND SUBJECT TO MINIMUM ORDER.

FUNCTION	ITEM #	FINISH			UNIT
Digital Single Locking Interconnected Lock with Pin Code / RFID	EJHILSG-30	US26D	US1, 15	US10B, 26, 3, 4	EACH
	EJHILDOV-30				
	EJHILMAN-30				
	EJHILROC-30				
	EJHILHOL-30				
	EJHILVEN-30				
Digital Single Locking Interconnected Lock with Pin Code / RFID & Smart Connect Module	EJHILSG-30-SCM	US26D	US1, 15	US10B, 26, 3, 4	EACH
	EJHILDOV-30-SCM				
	EJHILMAN-30-SCM				
	EJHILROC-30-SCM				
	EJHILHOL-30-SCM				
	EJHILVEN-30-SCM				

► **PACKAGING INCLUDES:**

- **UL-Listed** Adjustable 2 3/4" or 2 3/8" deadbolt, 2 1/4" x 1" faceplate with plastic filler
- **UL-Listed** 2 3/4" backset, 2 1/4" x 1" faceplate with plastic filler
- 2 RFID Cards, 4 Batteries,
- T-Strike, 2 3/4" x 1 1/8" Deadbolt Strike
- 3" screws with wood frame reinforcer

► **ADDITIONAL PARTS FOR EJJHIL SERIES**

ILLUSTRATION	ITEM #	DESCRIPTION	FINISH	UNIT
	CRPRFID	Extra RFID card Operates at 13.56MHz in accordance with ISO 14443A. Inductive distance up to 1 3/16"	---	EACH
	RFID-DFE	Optional RFID Keyfob Dual Frequency Enamel Fobs. Operates at 125 KHz + 13.56 MHz. Size: 1 1/8" x 2". Includes metal keyring	---	EACH
	CR6000-BLE	Optional Smart Connect Module. Used with ExperienSmart app for both Apple & Android phones. (8m-10m detection range)	---	EACH
	UL-SHIL238	2 3/8" UL-Listed Spring Latch, 2 1/4" x 1" faceplate	US3, 26D, 10B, 10BE	EACH
	UL-SHIL234	2 3/4" UL-listed Spring Latch, 2 1/4" x 1 1/8" faceplate		
	ULSJHIL234	2 3/4" UL-listed Spring Latch, 2 1/4" x 1" faceplate	US3, 26D, 10B	
	ULJHILADJ	UL-Listed Adjustable 2 3/8" or 2 3/4" Deadbolt Latch with plastic filler	US3, 26D, 10B	EACH
	FLS	Full Lip Strike	US3, 26D, 10B, 15, 4, 5, 26	EACH
	ASAST	ASA Strike	US3, 26, 26D	EACH
			US10, 10B, 10BE, 1	EACH
	EXASA-175	Extended Lip ANSI Strike 1 3/4" Lip Extension from Screw Center Line	US32D, DURO	EACH

► **ANTI-MICROBIAL COATING**

Available on US26D finish only.

► Specify "ANTB" when ordering.