

FLLV, ADJUSTABLE FUSIBLE LINK LOUVERS


90 Minute Fire-Rated Steel Louvers

IN STOCK
FOR IMMEDIATE SHIPPING


OTHER FRAME COLORS
AVAILABLE WITH
FACTORY LEAD TIME
(STANDARD DISCOUNT ONLY)



Intertek

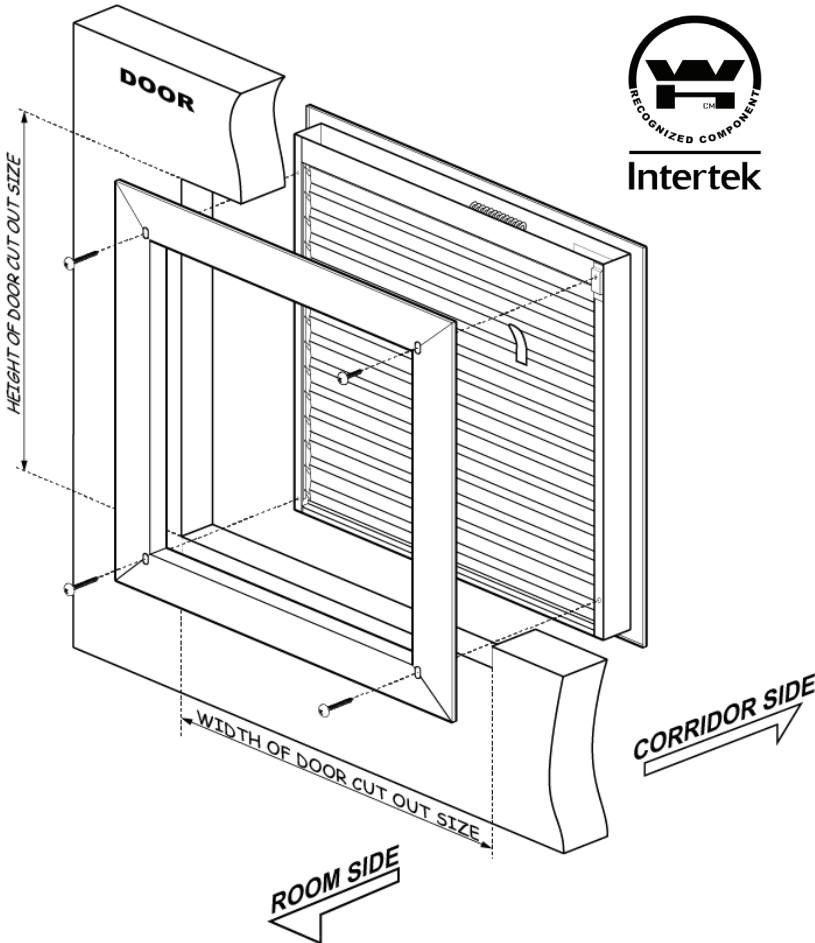

- ▶ For use in Fire Rated Door Applications under Positive and Neutral Pressure Intertek Testing Certification in Compliance to NFPA 252 (2000), UL 10C (2009), NFPA 252 (2012), CSI Code 089000 Louvers & Vents
- ▶ Fusible Link Design Temperature 165°F Max
- ▶ 16 Gauge Cold Rolled Steel Frame and Blades
- ▶ Mitered Welded Corner Frame Construction
- ▶ Free Flow Area: 45% free area
- ▶ 1 9/16" Deep Louver Assembly
- ▶ Cadmium Plated Steel Rivets
- ▶ Cadmium Plated Steel Tension Spring
- ▶ Door Size Thickness: 1 3/4" Only
- ▶ Baked on Powder Coat Finish
- ▶ Color: **Dark Bronze (DB)**
- ▶ **See color chart on page 1 of the catalog for CUSTOM COLORS, available with factory lead time at standard discount only**
- ▶ Fasteners: (3) #8 x 3/4" & (1) #8 x 1/2" LG
- ▶ Individually boxed

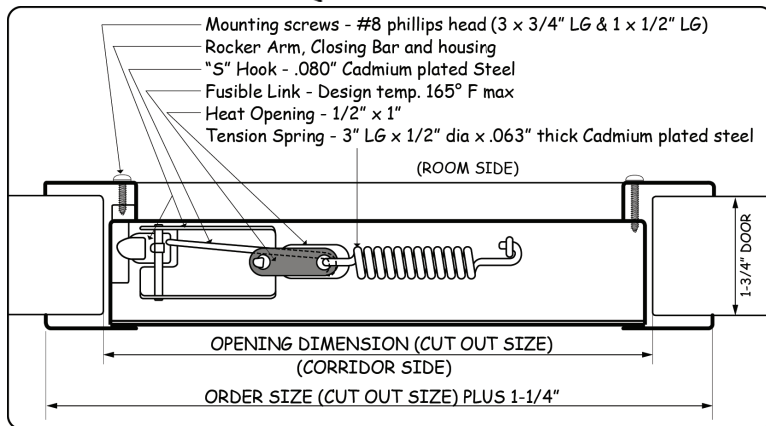

Aluminum Insect Screen for FLLV Series
Framed Aluminum Insect Screen (prefix FA)
Ex. FAFLLV1212

ITEM #	SIZES (DOOR CUTOUT) Width x Height	PCS /MC
FLLV1212	12" x 12"	4
FLLV1224	12" x 24"	2
FLLV1812	18" x 12"	2
FLLV1818	18" x 18"	2
FLLV1824	18" x 24"	2
FLLV2412	24" x 12"	2
FLLV2418	24" x 18"	2
FLLV2424	24" x 24"	2