

GLS9800 (Non-Fire Rated) & FGLS9800 (Fire Rated)



Narrow Stile Rim Type Exit Device, ANSI A156.3 Grade 1
3-Hour Rated, UL-Listed; Options: Alarm, Electrified

ILLUSTRATION	ITEM #	DESCRIPTION	FINISHES
<p>LIFETIME WARRANTY</p> <p>BHMA CERTIFIED Be Safe. Be Secure. Look for the Mark.</p> <p>MEETS The Buy American Act</p>	NON-FIRE EXIT HARDWARE		
	GLS9800EO36	Rim Exit Device for 36"	US32D, US10B
	GLS9800EO48	Rim Exit Device for 48"	
	FIRE EXIT HARDWARE RATED 3 HOURS (Includes thru-bolts)		
	FGLS9800EO36	Rim Exit Device for 36"	US32D, US10B
	FGLS9800EO48	Rim Exit Device for 48"	

❖ ❖ ❖ MUST ORDER TRIM SEPARATELY ❖ ❖ ❖

TRIMS & ACCESSORIES LIST PRICE

- All trims include 6-pin "C" keyway cylinder.
- Other major manufacturers' keyways available. (See page E27)
- 4 pcs per master carton

ALARM AVAILABLE

- Alarm available on 36" bar only.
- Prefix NALRM before PART#.

ELR, RX, LX, RXLX and
POWER SUPPLIES AVAILABLE
See PAGES E44-E46

NON-STOCK FINISHES

- Availability subject to minimum quantity and lead-time. Consult factory.
- Non-Handed
- 4 pcs per master carton

ANTI-MICROBIAL

- Available on US32D finish Only.
Use part # ANTB-EXIT

IMPORTANT:
GLS9800 Trims can be used
with GLS7700 Exit Devices

★ TRIMS AND ACCESSORIES ★

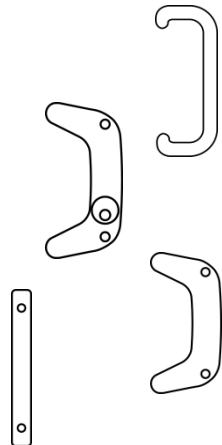
ILLUSTRATION	ITEM #	DESCRIPTION	FINISH	PCS / MC	UNIT
ESCUTCHEON TRIMS (Non-Handed)					
	GLSRIM9800	Clutch Entrance, key-locks or unlocks escutcheon trim ANSI FUNCTION (08)	US26D, US10B	12	Ea.
	Ⓢ ICGLSRIM9800				
	Ⓢ ICSCGLSRIM9800				
	GLSRIM9805	Clutch Storeroom, key unlocks the lever, lever retracts latch bolt, otherwise always locked ANSI FUNCTION (09)			
	Ⓢ ICGLSRIM9805				
Ⓢ ICSCGLSRIM9805					
GLSRIM9830	Passage, trim always operable and free ANSI FUNCTION (14)				
GLSRIM9840	Dummy Escutcheon trim ANSI FUNCTION (02)				

Ⓢ (IC) Indicates function available with Best, Falcon & Arrow Interchangeable Core.
Ⓢ (ICSC) Indicates function available with Schlage Full Size Format Interchangeable Core.

► TRIMS & ACCESSORIES

All trims include 6-pin "C" keyway cylinder. Other major manufacturers' keyways available. (See below)

★ TRIMS AND ACCESSORIES ★

ILLUSTRATION	ITEM #	DESCRIPTION	FINISH	PCS / MC	UNIT
	OFSTPUL-10	Offset Pull Trim for Narrow Stile device	US10B US32D ALUM	1	Each
	98GLSNL ● IC98GLSNL ● ICSC98GLSNL	C-Pull Trim with Cylinder for Narrow Stile device (Specify Handing)	US10B US32D ALUM, DB		
	98GLSUP	C-Pull Trim without Cylinder for Narrow Stile device	US10B US32D ALUM, DB		
	GLSRIMEOP	Outside cover plate for rim devices only	US10B, 26D		
	98GLSCYL-1 ● IC98GLSCYL-1 ● ICSC98GLSCYL-1	Cylinder Trim for Narrow Stile device	US10B, 26D		

STRIKES & ACCESSORIES

48CD9800 ● IC48CD9800 ● ICSC48CD9800	Cylinder dogging kit for 36" GLS9800 Series Narrow Stile Rim Non-Fire Rated Exit Devices	US10B, 3, 32D	1	Each
NVALARM48 ● ICNVALARM48 ● ICSCNVALARM48	Alarm kit for 36" GLS9800 Series Narrow Stile Rim Exit Devices	US10B, 32D, ALUM, DURO		
233	(Flush Mount) Bottom Strike. Standard for CVR & SVR Type Exit Devices	---		
N-265	(Surface Mount) Bottom Strike. Standard for CVR & SVR Type Exit Devices			
N-260	Top strike, Standard for CVR & SVR Type Exit Devices			
N-221	Optional Bottom Strike for CVR & SVR Type Exit Devices			
N-CVROD96	Vertical Top Rod for 96" doors			
CUT CHARGE	Labor for cutting exit devices to size (applicable to all Series)			
ANTB-TRIM	Anti-Microbial Coating on Exit Device Trims in US26D only			

FOR MULLIONS AND ACCESSORIES, PLEASE REFER TO PAGE E52.

- (IC) Indicates function available with **Best, Falcon & Arrow Interchangeable Core.**
- (ICSC) Indicates function available with **Schlage Full Size Format Interchangeable Core.**

◆ OTHER KEYWAYS

GLSRIM9800, GLSRIM9805, GLSESC-00, GLSESC-05, 48CD9800, NVALARM48
 Schlage C-K, Russwin D1, D2, D3, Corbin 60, Sargent LA-LB-LC, Falcon / Weiser E, Corbin-Russwin L4, Arrow A, Yale8, Yale GA, Kwikset.