

## GOOSE NECK FLOOR STOP GS119

### Features

- Special design allows for adaptability in all types of construction
- Smooth and aerodynamic design provides minimum obstruction to cleaning efforts
- Can accommodate door undercut up to 1 1/2"
- Rubber tip does not scar nor mark surface of door
- Hanger bolt (5/16"). Drill 19/64" diameter on wood floor. (A)
- Wood screw #14 x 1", packed with expansion shield and screw anchor. Drill 25/64" diameter on wood floor. (B)
- Machine screw and anchor (1/4 - 20 x 1") Drill 1/2" diameter x 1" depth hole behind stop. Install anchor and fasten screw. (C)
- Machine thread stud 5/16" x 2 1/2". Threads in to stop. Drill concrete for expansion shield (5/8" dia x 1 3/8" depth). Thread stud into expansion shield. (D)

### Material

- Cast Brass

### Finishes



- US3 - Bright Brass
- US4 - Satin Brass
- US5 - Satin Brass, Oxidized
- US10 - Satin Bronze
- US10B - Antique Bronze, Oiled
- US15 - Satin Nickel
- US15A - Satin Nickel, Oxidized
- US26 - Bright Chrome
- US26D - Satin Chrome

### Code Compliance

- Conforms to ANSI/BHMA 156.16, L12131 for brass



GS119

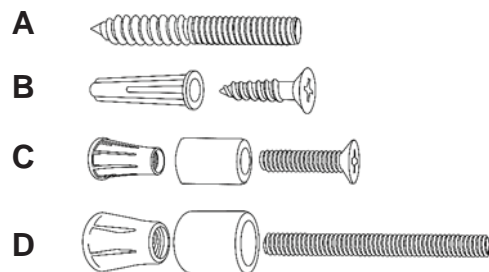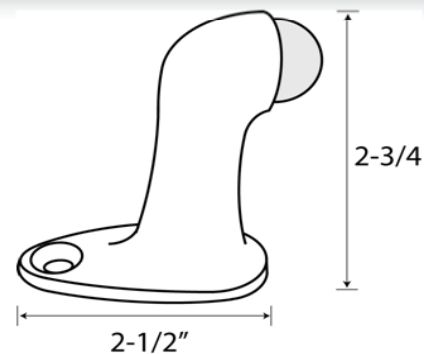

BHC-7017-03/23-1of1

### CAL-ROYAL PRODUCTS, INC.

6605 Flotilla St., City of Commerce, CA 90040 U.S.A.  
Phone: (323) 888-6601 • (800) 876-9258 • Fax: (323) 888-6699 • (800) 222-3316  
Email: sales@cal-royal.com • Website: www.cal-royal.com

The illustration and technical description in this cut sheet is current as of the date in the version date on the right. Cal-Royal Product reserves the right to, and may, on occasions, make changes and/or improvements in designs and dimensions without prior notice.

VERSION  
2023.1.0

© Cal-Royal Products, Inc. 2023