


N-MR7700 & N-FMR7700 Series




GRADE 1 Mortise Lock Exit Device

LIFETIME WARRANTY	BHMA CERTIFIED Be Safe. Be Secure. Look for the Mark.	MEETS The Buy American Act	ADA COMPLIANT	3 HOUR FIRE RATED UL10C, UBC7-2-1997
--------------------------	---	-----------------------------------	---------------	--------------------------------------

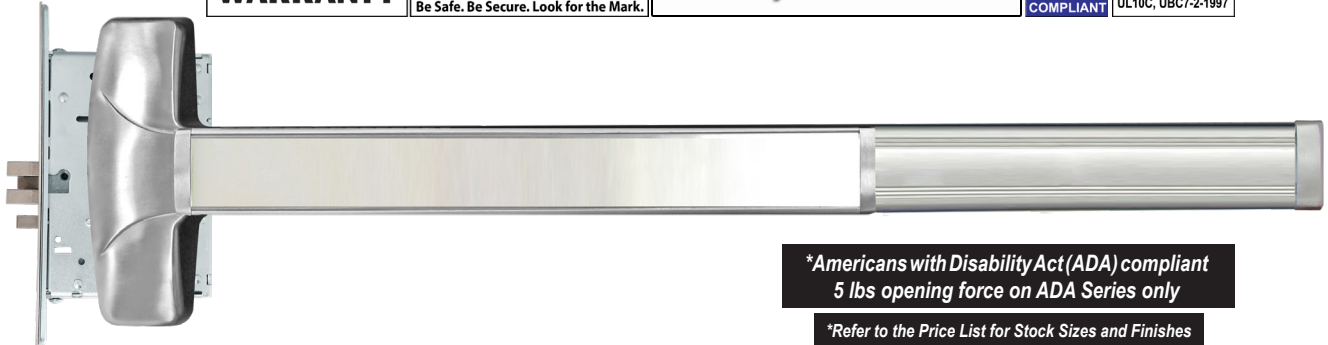


***Americans with Disability Act (ADA) compliant
5 lbs opening force on ADA Series only**

***Refer to the Price List for Stock Sizes and Finishes**

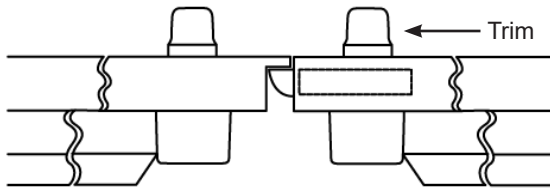


Pair of Doors



Single Doors

Specifications

For Doors.....	Wood / Metal 1 3/4" (44.5 mm) minimum thickness 4 1/2" (114 mm) minimum stile width
Mortise Lock Case.....	Steel
Head Chassis.....	Aluminum
Chassis Cover.....	Zinc Material
Mounting.....	Furnished standard with wood and machine screws
End Cap.....	Aluminum
Handing.....	Handed. Easily Field Reversible. Specify RHR or LHR for convenience
ANSI Standard.....	A156.3, Grade 1
Strikes.....	Standard ANSI Strike (Stainless Steel)
Fire Exit Hardware.....	N-FMR7700 Series for fire exit hardware for all types of 8' x 8' double doors for up to 3 hour fire labeled installations. Conforms to standards UL10C and UBC 7-2-1997 codes.
Mortise Lock.....	Grade (1) for 1 3/4" (44.5mm) thick doors. Handed, Field Reversible. Specify RHR or LHR. Fits door prepared for ANSI Standard A115.1
Trim.....	See Trim Designs section
Electronic Functions.....	(ELR) Electrical Latch Retraction and RX & LX Signal Switch available
Alarm.....	Prefix "NALRM" before PART #
Dogging Feature.....	Cylinder dogging available for non-fire rated applications
Anti-Microbial Coating.....	Available on US32D only. Use part # ANTB-EXIT

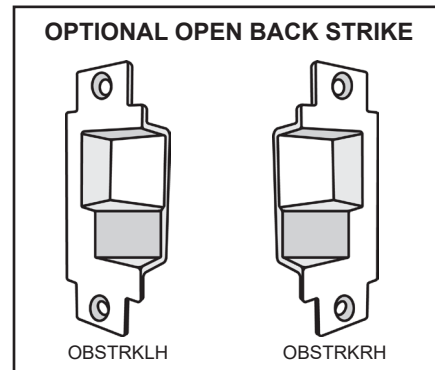

MODEL SIZE	ACTUAL LENGTH	MAX CUT DOWN	DOOR SIZE
N-MR7700EO36, N-FMR7700EO36 N-MR7705EO36, N-FMR7705EO36	32"	6"	30" to 36" door width
N-MR7700EO48, N-FMR7700EO48 N-MR7705EO48, N-FMR7705EO48	44"	12"	36" to 48" door width