




Weather Seal Door Accessories

INT-001 Intumescent Adhesive Gasketing

INT-001 Intumescent Adhesive Gasketing

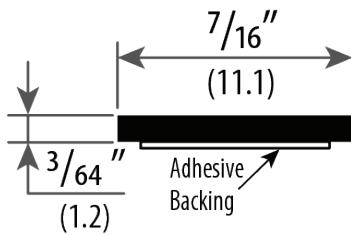

ITEM INFO:
C-550

Length: **17', 20', 25',
204', 510'**

Available Finishes:
B (Black), **W** (White)

Tools Required:

- Cutting tools
- Rugs

Packaging includes:

- Frame cleaner (1 pc)
- Seal sticker (1pc)

Installation Guidelines for **INT-001** Intumescent Adhesive Gasketing

Door Frame Preparation:


Clean the door frame thoroughly with a good cleaning agent that removes any particles that can affect the adherance of the gasket, dust, or cleanser build-up. Check the frame surface if it is completely dry before installation. Always use a cleaning agent that is not a petroleum base.

Preferred schedule for installation:


The best time (schedule) to install the **ADHESIVE GASKET** is when most of the major work in construction has been completed or change occupancy maintenance field of work. Where area is already in the cleaning phase of the project time table. This is important to avoid foreign particles on the frame and the adhesive during installation.

Important Reminder and Notice:

1. When handling the adhesive gasket, avoid extending or expanding the item. It may deform in size or affect the quality of the item.
2. Apply steady straight pressure when installing the gasket. Use appropriate tools like seam roller to strengthen the gasket.
3. Avoid expanding the material when applying pressure using roller.
4. Inspect the gasket adhesion after a few hours that it has been installed.
5. Make sure to apply enough pressure when putting the gasket in the **HEAD JAMB**.

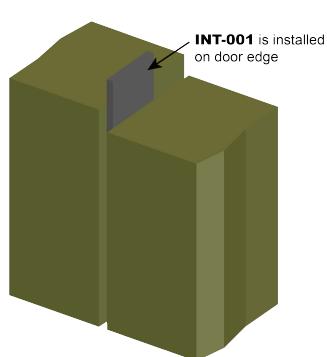


FOR MEETING STILE
APPLICATIONS

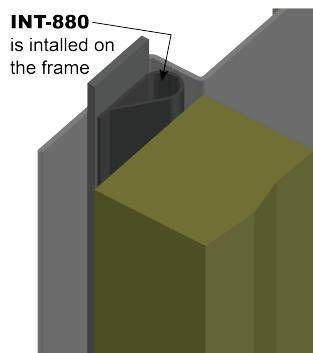





FOR FRAME
APPLICATIONS

Installation Guidelines Continued:

Installation Procedure: For Meeting Stile Applications

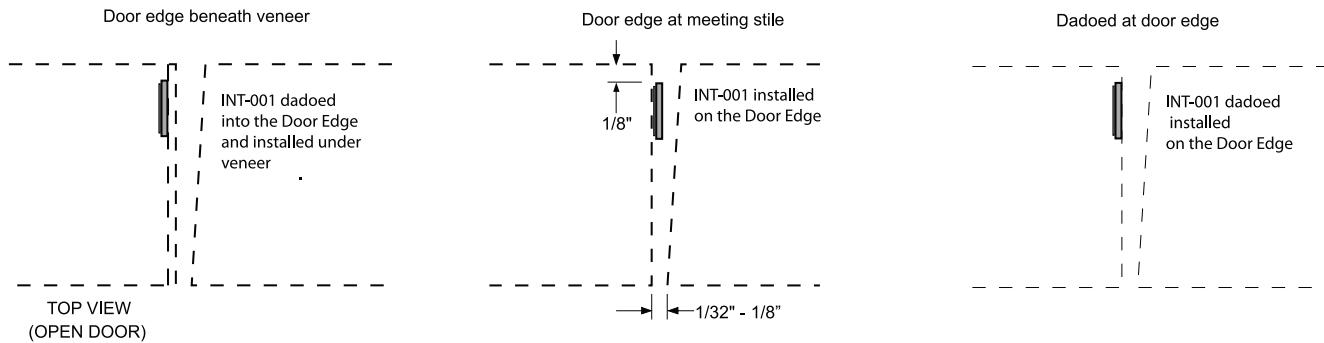

For Frame Applications

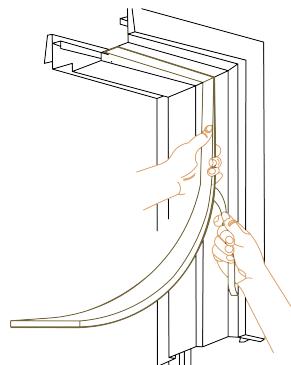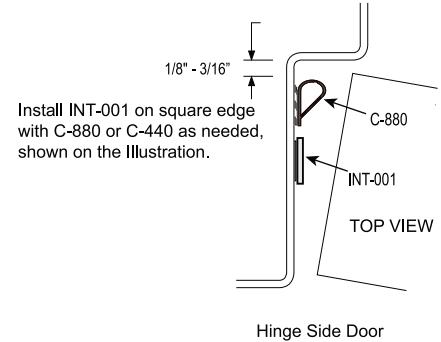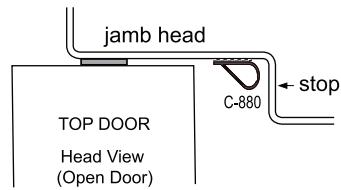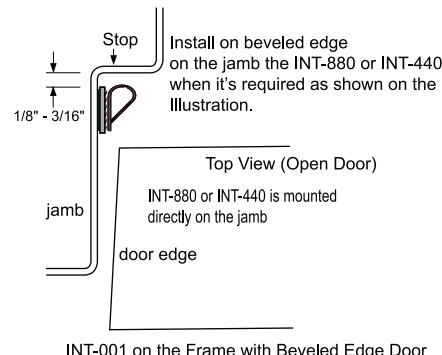

Note: Installing in different layout around the door jamb (head, hinge jamb, & strike jamb) is applicable as long as the door would be able to operate properly.