


RC88

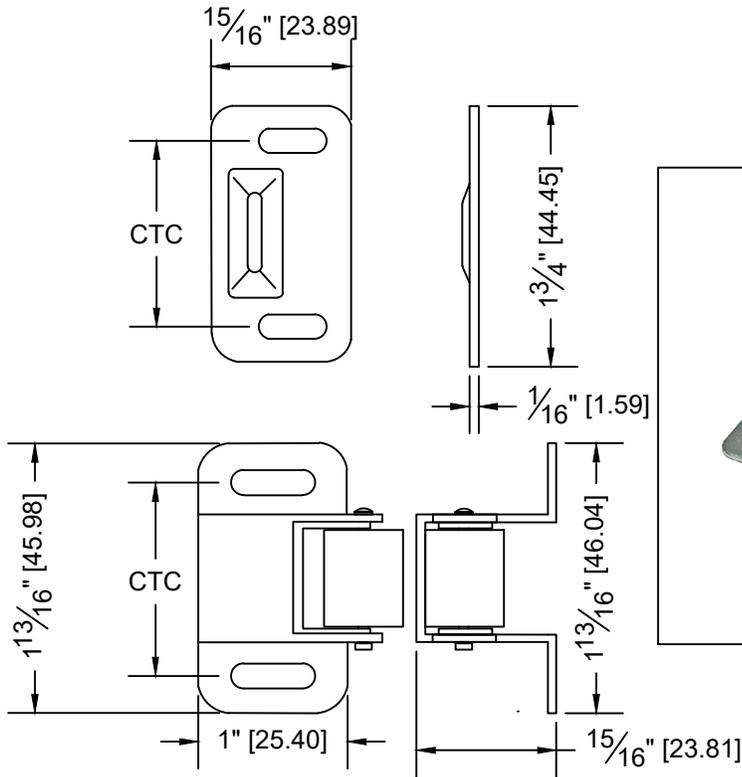

Material : Steel
 Finishes : US3, US10B & Zinc
 Code compliance : Conforms to ANSI / BHMA 156.9 B83112
 Fastener : # 6 x 1/2" Pan Head Screw

Installation Instruction:

Step 1. With pencil mark the location you want the catch to be attached to the door. Use a spirit level to ensure that the catch is perfectly level. Then, use a pencil to mark the corners and screw holes.

Step 2. Drill hole in the door for the body of the catch and for the screw holes. Check that the catch is perfectly level again, once the screws have been securely fitted.

Step 3. With the help of a tape measure and spirit level fit the catch keep, also known as the strike plate, opposite to where the roller catch it. Mark the screw holes with pencil and make sure that the catch keep align with the catch properly. Then drill the screws in the screw holes. (Note: if you are replacing your old door catch, remember to remove the old catch keep from the door as well before closing the door. Otherwise, you could have difficult getting out).

Step 4. Push the door gently to check the compression of the catch. If the catch is hitting the catch keep and not closing, you'll have to adjust it and reduce the catch projection. Once you've done this, and the door is closing fine - you're done!

The illustration and technical description in this cut sheet is current as of the date in version date on the right.
 Cal-Royal Product reserves the right to, and may, on occasions, make changes and/or improvements in designs and dimensions without prior notice.

	6605 Flotilla Street City of Commerce CA 90040 USA Tel.# (323) 888-6601 FAX # (323) 888-6699 WEB SITE: CAL-ROYAL.COM Email: sales@cal-royal.com		ITEM NO.	DESCRIPTION	NOT TO SCALE	UNIT	Prepared By:	DATE	DWG. NO.
	RC88	Installation Instruction of Roller Catch	PAGE 1 of 1	PRIMARY DIMENSION SHOWN IN INCHES, DIMENSIONS IN () ARE MM	BBT / AED / CVL	07/29/22	BHG 7003		
								REV	---