


8600 SERIES: ACCESSORIES

ACTUATORS & ACCESSORIES

PUSH PLATES 4.5" SQUARE HARD WIRED or WIRELESS



8636-SW

- 4.5 inch square stainless steel push plate
- Blue handicap logo only
- Available in Pair, Hard Wired, Item #: **8650-KIT**
- Available in Pair with Wireless Radio Kit, Item #: **8651-KIT**
- (1) **8636-SW**, Stainless steel push plate
- (1) **8636-SM**, 4.5" square surface mount box



PUSH PLATES 6" ROUND HARD WIRED or WIRELESS




8637-SW

- 6 inch round stainless steel push plate
- Blue handicap logo
- Available in Pair, Hard Wired, Item #: **8652-KIT**
- Available in Pair with Wireless Radio Kit, Item #: **8653-KIT**
- (1) **8637-SW**, 6" Stainless steel push plate
- (1) **8637-SM**, 6" round surface mount box



WIRELESS RADIO KIT

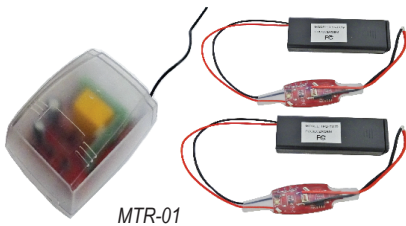

MTR-01

- **RADIO KIT** eliminates the hassle of wiring from actuator to controller.
- Federal Communications Commission (FCC) Approved
- For use with 8636-SW and 8637-SW for conversion or replacement
- (1) **Receiver**, 433 Mhz
- (2) **Transmitters**, 433 Mhz

VERTICAL ACTUATOR BAR HARD WIRED OR WIRELESS



ACT-36

- Exceeds California Building Code Section 1117B.6
- Weather Resistant, stainless steel construction
- Membrane switches provide quite & reliable activation
- Entire surface provides activation from any angle
- Can be mounted on a wall or to a bollard
- 6" W x 36" H x 1" Thick
- **ACT-36**, 36" Hardwired, txt & logo
- **ACT-900**, 36" Wireless, 900 MHz

INFRARED SAFETY SENSOR, HARD WIRED



SCAN-8660

- Low profile design reduces accidental damage
- Can be mounted horizontal or vertical
- Detects the presence of a pedestrian, while the door is opening or closing using triangulation
- Length: 34.5 inches
- Power: 12/24 VAC / VDC
- **SCAN-8660**, Door Mounted, active infrared safety sensor

ACTUATORS & ACCESSORIES

TOUCHLESS SWITCH, HARD WIRED



CTB-01

- Touchless, wave to open switch
- Active Infrared Sensing Technology, 1" - 5" range
- 2" x 4", Stainless Steel
- Fits in a single gang electrical box
- Power: 12/24V DC
- **CTB-01, 2.75" x 4.5", 1-gang, Text, Logo & Hand**

TOUCHLESS SWITCH, HARD WIRED



CTB-02

- Touchless, wave to open switch
- Active Infrared Sensing Technology, 1" - 5" range
- 4.5" x 4.5", Stainless Steel plate with surface mount plastic box
- Power: 12/24V DC
- **CTB-02, 4.5" x 4.5" Square, Text, Logo & Hand**

TOUCHLESS SWITCH, HARD WIRED



CTB-05

- Infrared Photoelectric Reflective Sensor Switch
- 2" - 8" range, With Red/Green LED indicator
- Adjustable timer delay function, 0.5 to 20 sec.
- 1.5" x 4.5", Stainless Steel
- Fits in a standard jamb size electrical gang box
- Power: 12/24V DC
- **CTB-05, 1.5" x 4.5", single gang, Text & Hand**

TOUCHLESS SWITCH, HARD WIRED



CTB-07

- Infrared Photoelectric Reflective Sensor Switch
- 2" - 8" range, With Red/Green LED indicator
- Adjustable timer delay function, 0.5 to 20 sec.
- 4.5" x 4.5", Stainless Steel plate with surface mount plastic box
- Power: 12/24V DC
- **CTB-07, 4.5" x 4.5" Square, Text, Logo & Hand**

TOUCHLESS SWITCH, WIRELESS



CTB-08W

- Touchless, wave to open switch
- Battery Powered, Active Infrared Sensing Technology, 1"-11" adjustable sensing range
- 2.4GHz Wireless Frequency
- LED Indicator, signal output for 1.5 seconds
- with built-in Radio Transmitter
- 4.5" x 4.5", Stainless Steel plate
- Sold per pair (2 Switches & 1 Receiver)
- Power: 12-30V DC
- **CTB-08W, 4.5" x 4.5" Square, Text, Logo & Hand**

TOUCHLESS SWITCH, WIRELESS



CTB-09W

- Touchless, wave to open switch
- Battery Powered, Active Infrared Sensing Technology, 1"-9" adjustable sensing range
- 2.4GHz Wireless Frequency
- with built-in Radio Transmitter
- Red/Green LED Indicator
- 4.5" x 4.5", Polycarbonate plate
- Sold per pair (2 Switches & 1 Receiver)
- Power: 12-30V AC/DC
- **CTB-09W, 4.5" x 4.5" Square, Text, Logo**

TOUCHLESS SWITCH, HARD WIRED



8630SW

8631SW

8632SW

- Utilizes microwave motion technology
- 2" to 24" detection range
- Audible and visual alert indications of activation
- Power: 12/24V AC/DC
- **8630SW, 4.5" x 4.5", double gang, Text & Hand**
- **8631SW, 4.5" x 2.75", single gang, Text & Hand**
- **8632SW, 4.5" x 1.68", Text & Hand**
- **8640-SM, double gang, surface mount box**
- **8641-SM, single gang, surface mount box**
- **8642-SM, 1.5" x 4.75" jamb surface mount box, Hardwired solutions only**

TOUCHLESS SWITCH, HARD WIRED



8633-SW

- Utilizes microwave motion technology
- Adjustable from 4" to 24" range
- Microwave cell can be mounted behind drywall
- Comes with both single gang and double gang faceplates
- Power: 12/24V AC/DC
- **8633-SW, Microwave Cell Switch, with Single and Double gang BLACK faceplate, Text & Hand**
- **8641-SM, Single gang, surface mount box**
- **8640-SM, Double gang, surface mount box**

TOUCHLESS SWITCH, SHORT RANGE HARD WIRED



8634-SW



8635-SW

- Utilizes capacitance technology
- Short range detection zone reduces unwanted activations
- Touchless design reduces the spread of bacteria, disease and contamination
- Power: 12/24V AC/DC
- **8634-SW, 6" Round, Text, Logo & Hand**
- **8635-SW, 4.75" Square, Text, Logo & Hand**